



ELECTRICAL SPECIFICATIONS

Frequency Range: 1.7-2.2 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.50 dB max.
 Isolation: 18 dB min.
 VSWR: 1.25 max.
 Forward Power: 50W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.10.21	A. M

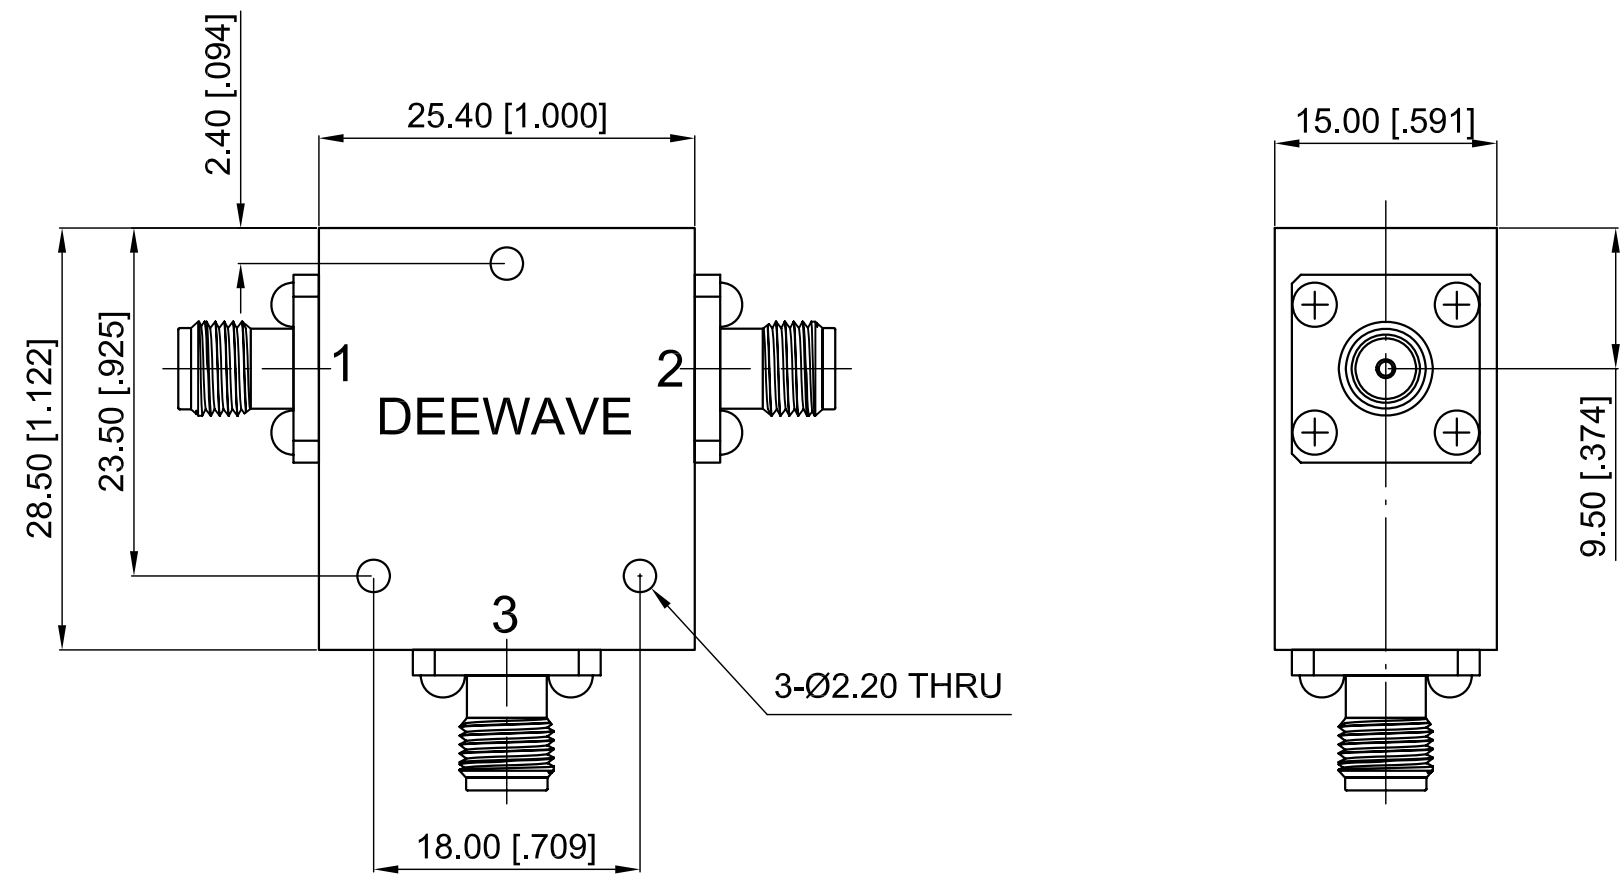

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn: W. Y 2015.10.21 Checked: T. L 2015.10.21 Approved: A. M 2015.10.21	Title: SMA Circulator Freq 1.7-2.2 GHz	 www.deewave.com
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	Part No: DCC170220	