

ELECTRICAL SPECIFICATIONS

Frequency Range: 698-1000 MHz

Impedance: 50 Ohm

Insertion Loss: 0.6 dB max.

Isolation: 18 dB min.


VSWR: 1.35 max.

Forward Power: 60 W

Reserve Power: 10 W

Operation Temp: 0~+60°C

| Revisions | | | |
|-----------|-----------------|------------|-----------|
| Rev | Description | Date | Approved: |
| A | Initial Release | 2015.06.08 | A. M |

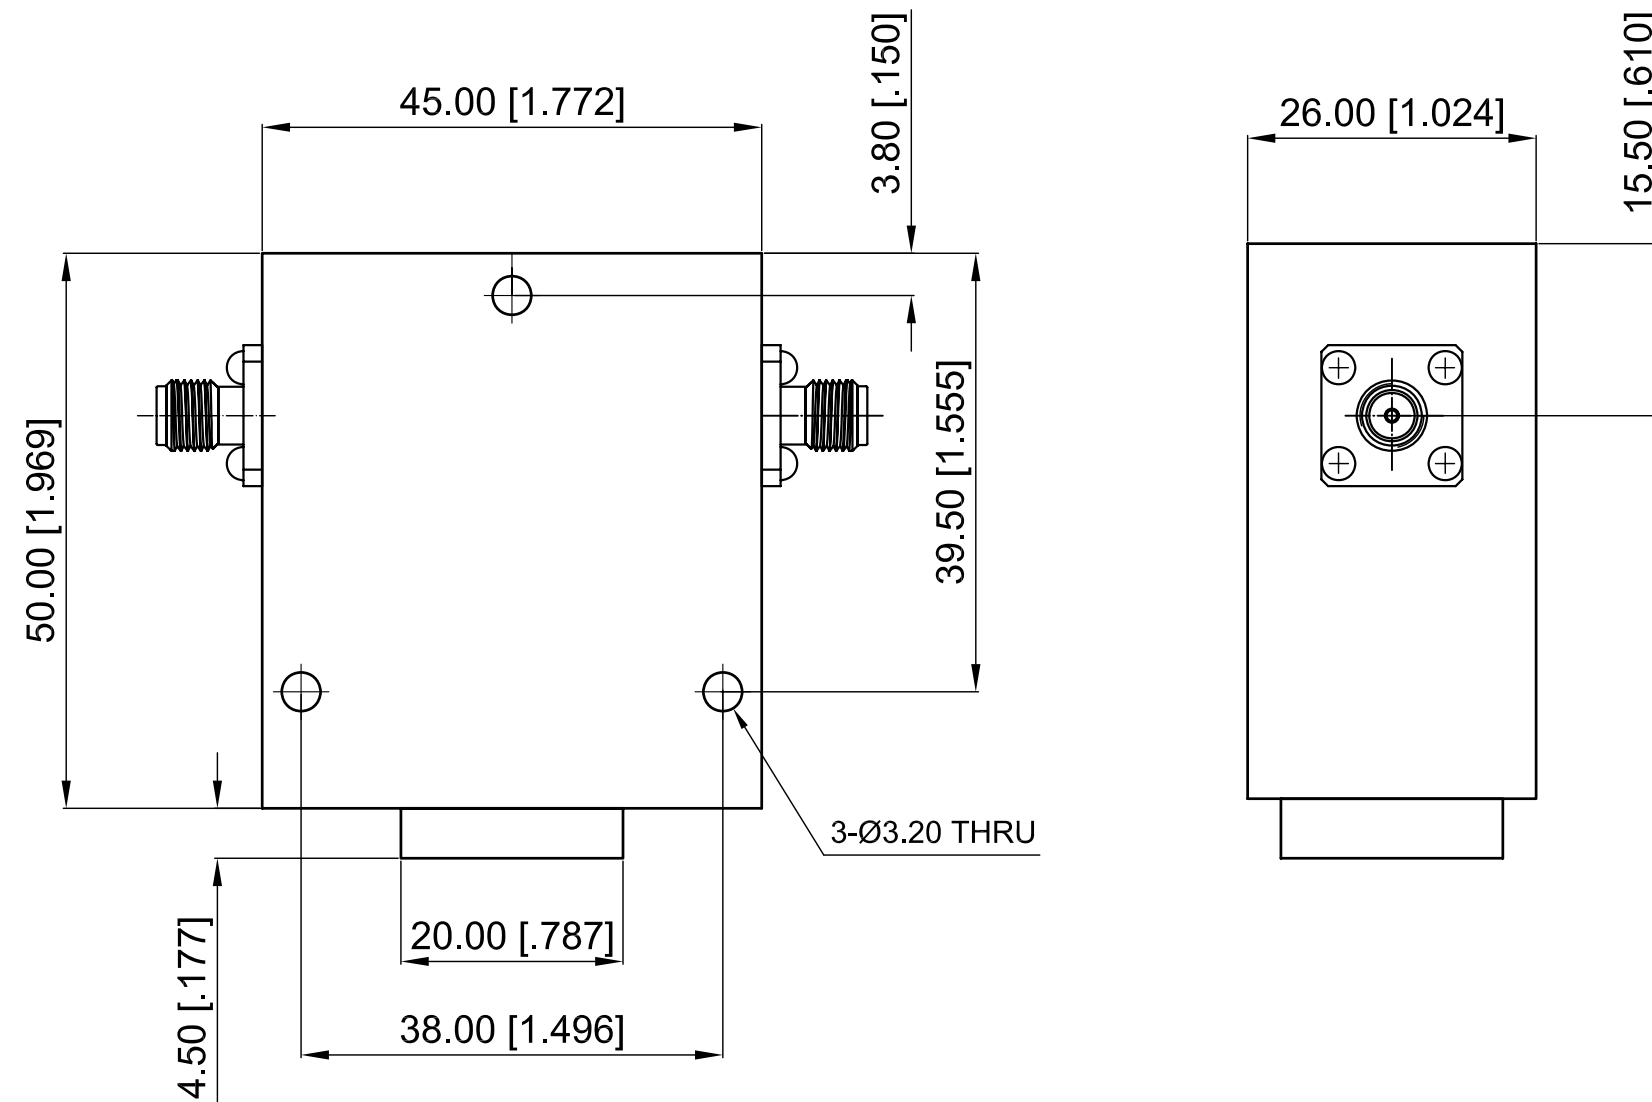

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

| | |
|--|-----------------|
| Drawn: | W. Y 2015.06.08 |
| Checked: | T. L 2015.06.08 |
| Approved: | A. M 2015.06.08 |
| Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2° | |

| | |
|----------|-----------------------------------|
| Title: | SMA Isolator Freq 698-1000 MHz |
| Part No: | DCI069100 |

DEEWAVE
www.deewave.com

View:

| | | | |
|----------|--------------|------------|--------|
| Size: A3 | Scale: 1.5:1 | Sheet: 1/1 | Rev: A |
|----------|--------------|------------|--------|