

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 1.43-1.52 GHz

Impedance: 50 Ohm

Insertion Loss: 0.30 dB max.

Isolation: 20 dB min.


VSWR: 1.25 max.

Forward Power: 60 W

Reverse Power: 10 W

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2016.5.6	A. M

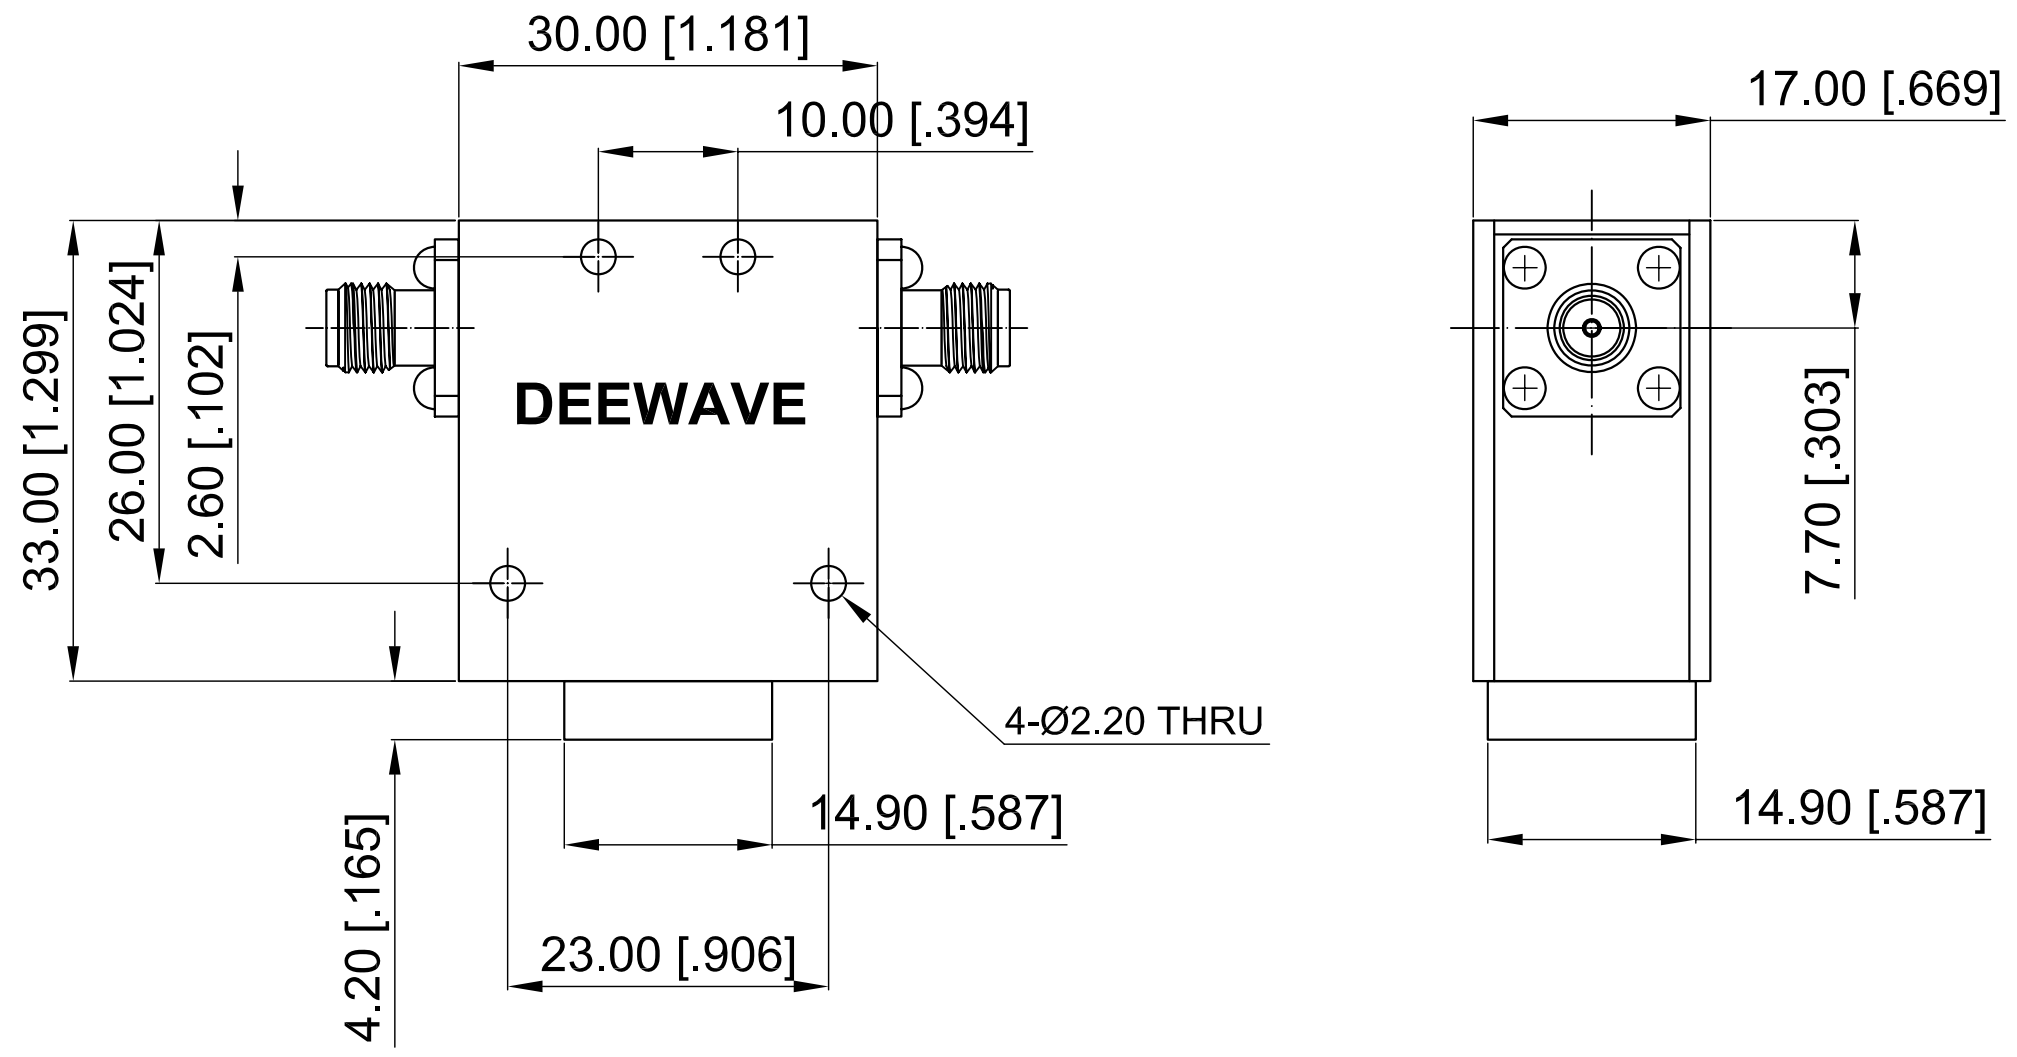

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2016.5.6
Checked:	T. L 2016.5.6
Approved:	A. M 2016.5.6
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 1.43-1.52 GHz
Part No:	DCI143152

**DEEWAVE**  
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	1:1	1/1	A