


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 2.2-2.3 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.30 dB max.  
 Isolation: 20 dB min.  
 VSWR: 1.25 max.  
 Forward Power: 50 W  
 Reverse Power: 20 W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2016.2.2	A. M

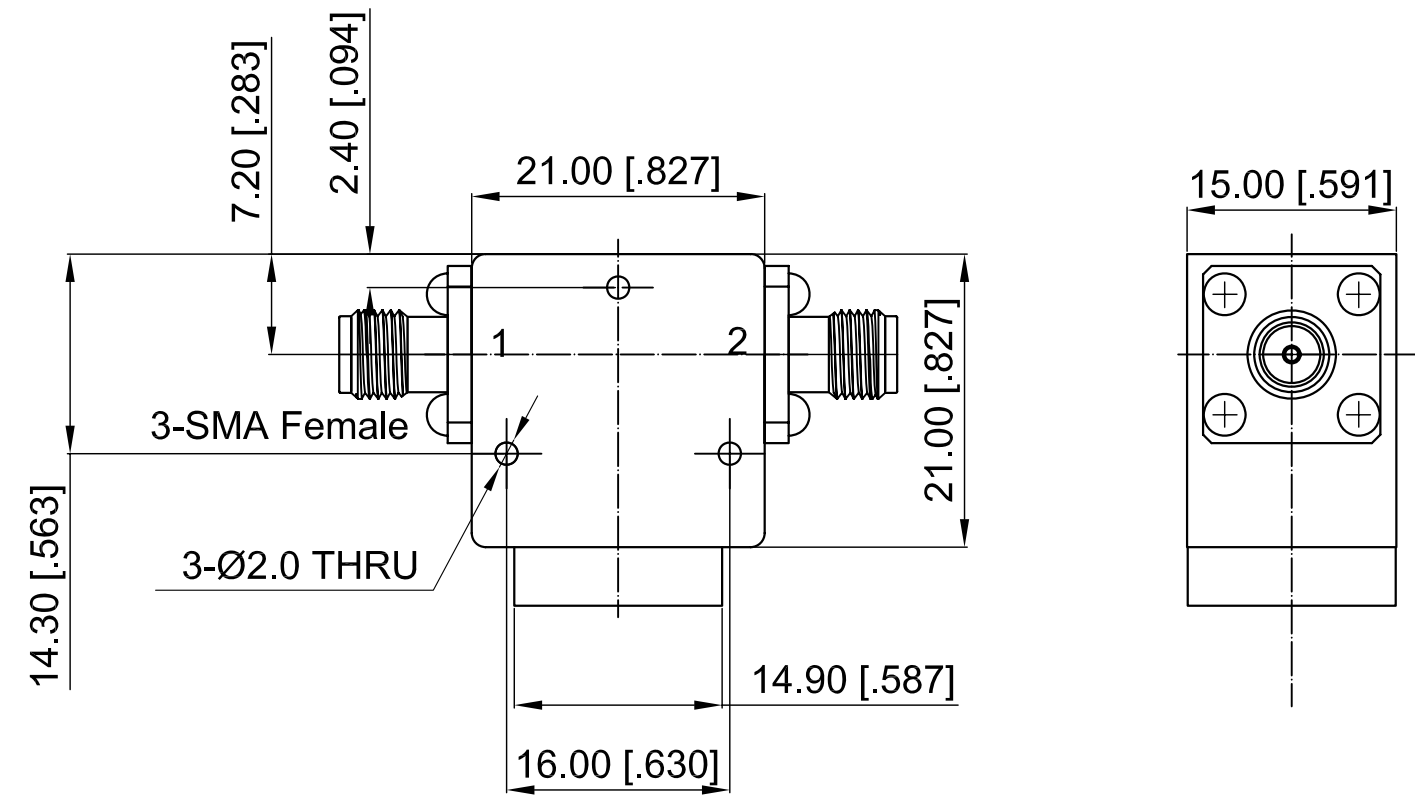

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2016.2.2
Checked:	T. L 2016.2.2
Approved:	A. M 2016.2.2
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 2.2-2.3 GHz
Part No:	DCI220230

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------