


ELECTRICAL SPECIFICATIONS

Frequency Range: 3.8-4.2 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.30 dB max.
 Isolation: 20 dB min.
 VSWR: 1.25 max.
 Forward Power: 60 W
 Reverse Power: 10 W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2016.5.6	A. M

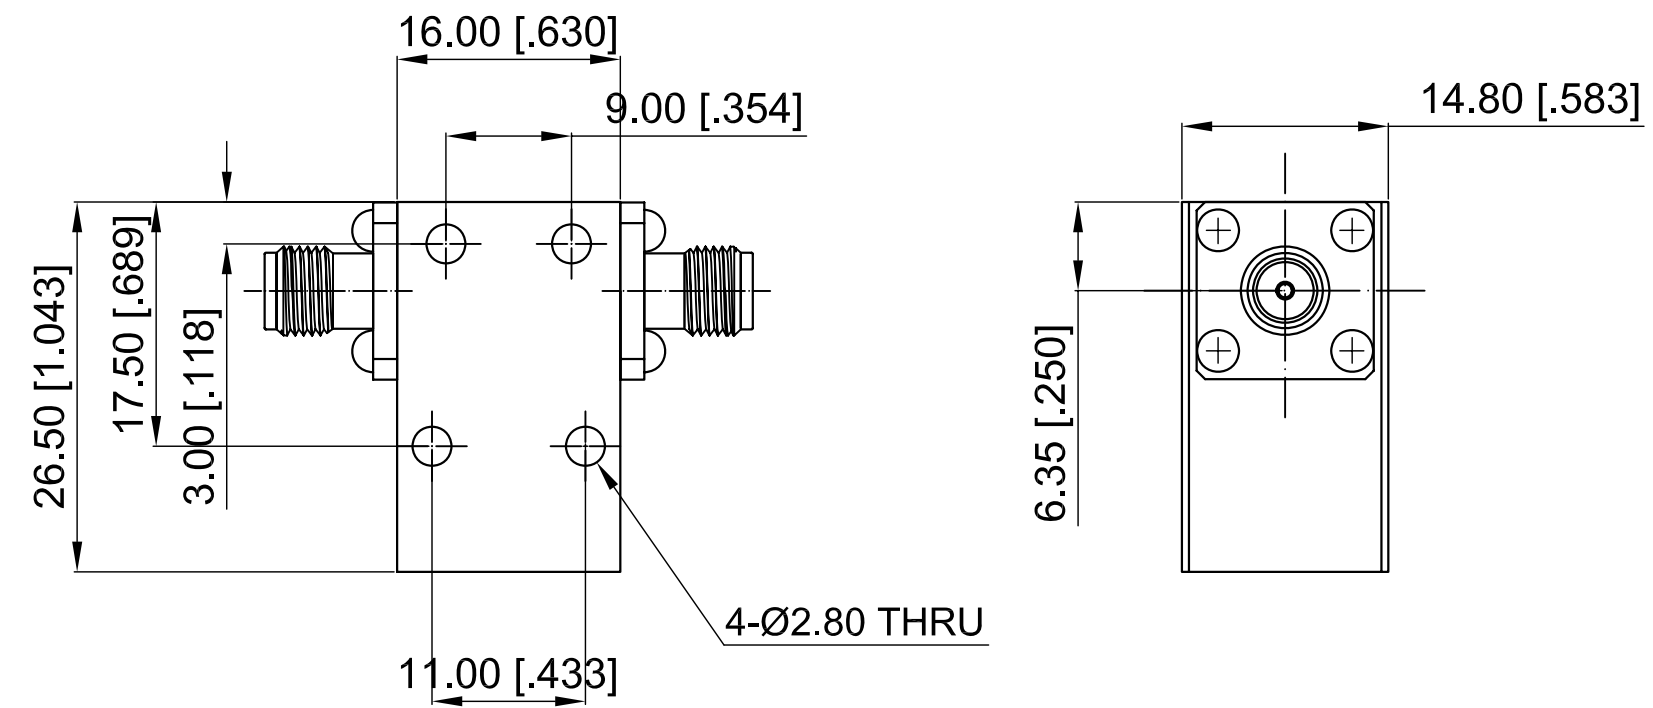

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2016.5.6
Checked:	T. L 2016.5.6
Approved:	A. M 2016.5.6
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 3.8-4.2 GHz
Part No:	DCI380420

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	1:1	1/1	A