


Product Model: Drop-in Isolator  
 Frequency Range: 1290-1310 MHz  
 Insertion Loss : 0.40 dB Max.  
 Isolation : 20 dB Min.  
 VSWR: 1.20 Max.  
 Forward Power: 250 W  
 Reverse Power: 250 W

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.3.5	A. M

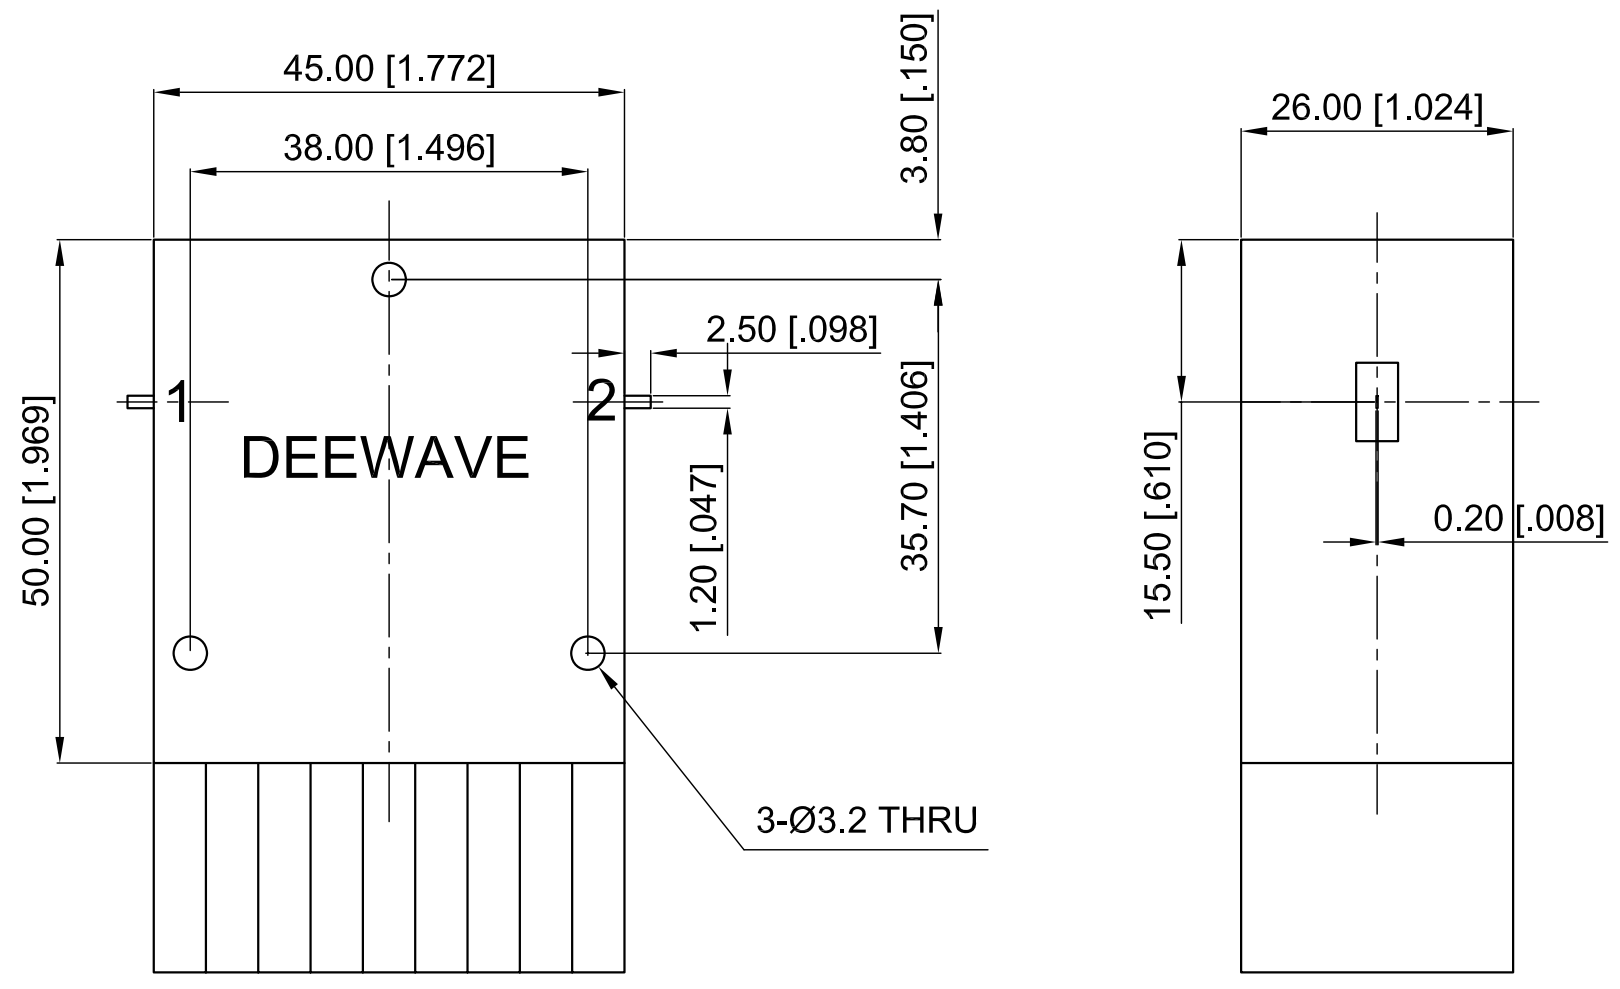

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.3.5
Checked:	T. L 2015.3.5
Approved:	A. M 2015.3.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 1290-1310 MHz
Part No:	DDI129131

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------