




**ELECTRICAL SPECIFICATIONS**

Frequency Range: 204-214 MHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.50 dB max.  
 Isolation: 20 dB min.  
 VSWR: 1.25 max.  
 Forward Power: 100W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2018.12.12	A. M

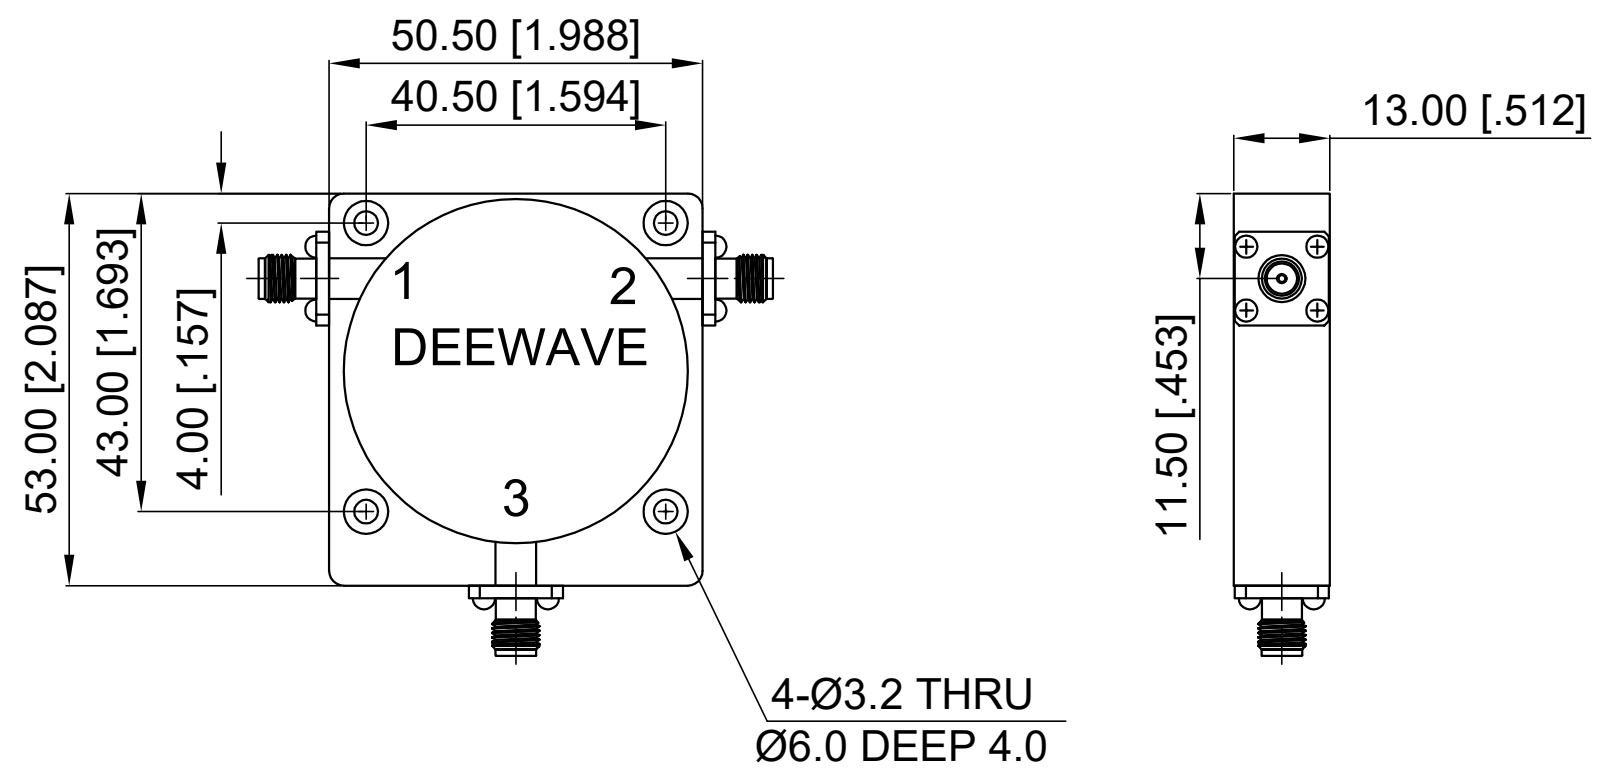

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2018.12.12	Title: <b>SMA Female Circulator Freq 204-214 MHz</b>	 <a href="http://www.deewave.com">www.deewave.com</a>				
Checked:	T. L 2018.12.12						
Approved:	A. M 2018.12.12						
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"]    .X ±0.20 [.008"]    X ±0.50 [.019"] .X° ±1°                    X° ±2°		Part No:	<b>DCC020021</b>				
		View:					
Size:	A3	Scale:	1:1	Sheet:	1/1	Rev:	A