




ELECTRICAL SPECIFICATIONS

Frequency Range: 410-460 MHz
 Impedance: 50 Ohm
 Insertion Loss: 0.40 dB max.
 Isolation: 20 dB min.
 VSWR: 1.20 max.
 Forward Power: 100W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2018.6.26	A. M

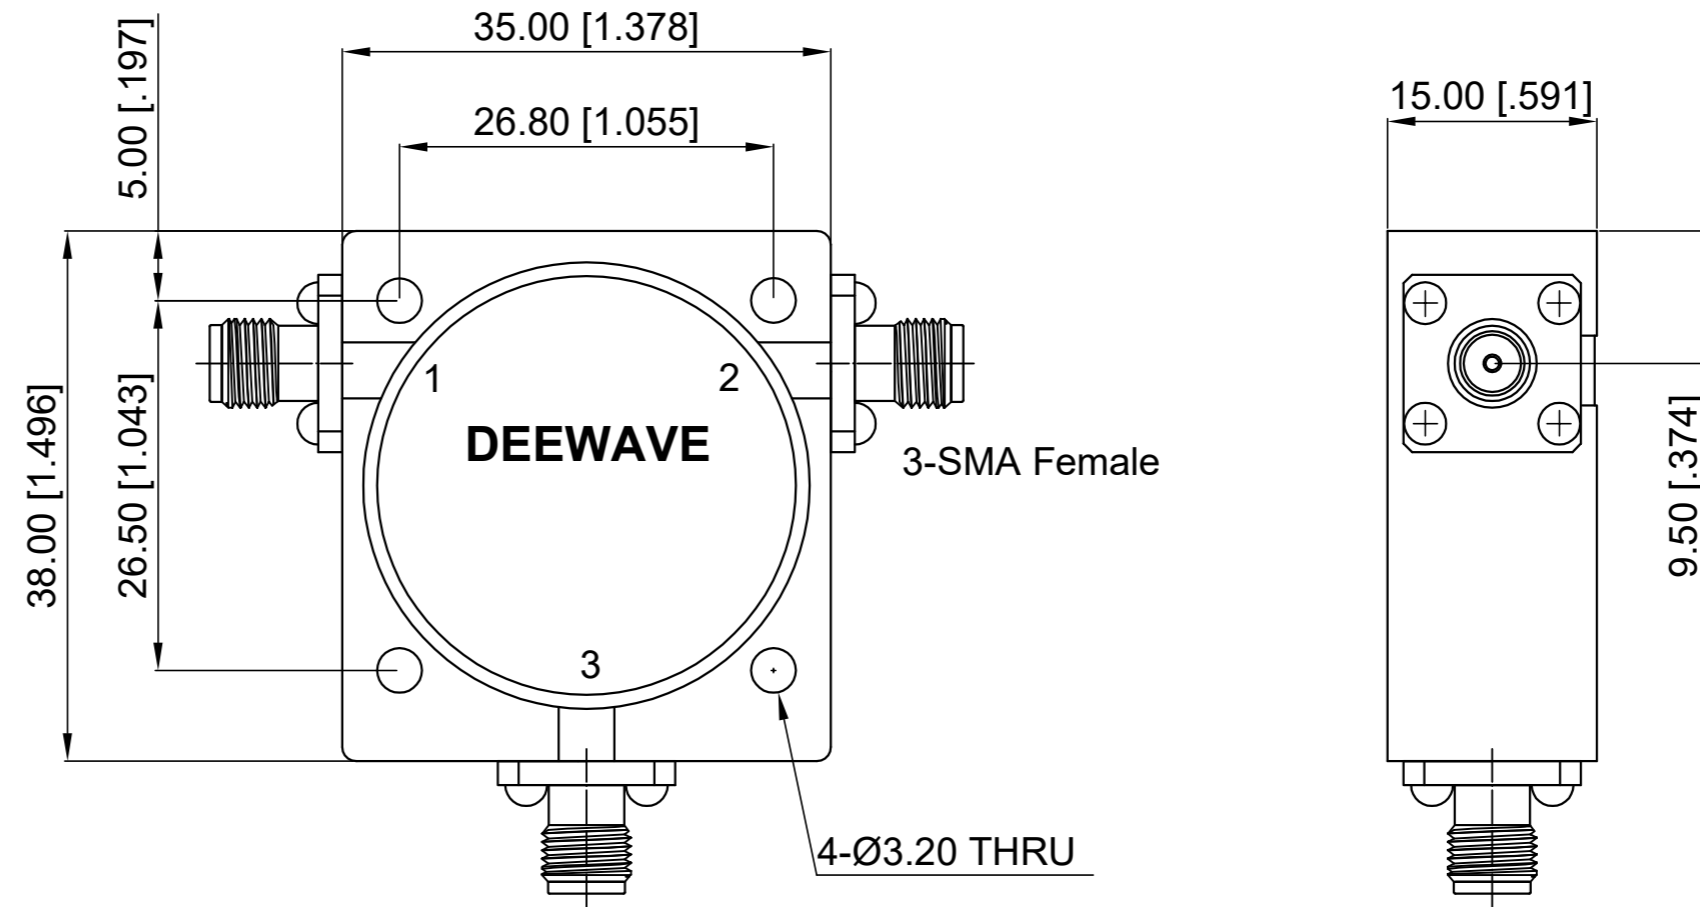

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn: W. Y 2018.6.26	Title: SMA Female Circulator Freq 410-460 MHz	 www.deewave.com	
Checked: T. L 2018.6.26			
Approved: A. M 2018.6.26			
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Part No: DCC041046	View: 
Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A