

# ELECTRICAL SPECIFICATIONS

Frequency Range: 600-900 MHz

Impedance: 50 Ohm

Insertion Loss: 0.80 dB max.


Isolation: 15 dB min.

VSWR: 1.50 max.

Forward Power: 100W

Direction: Clockwise


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.5.6	A. M

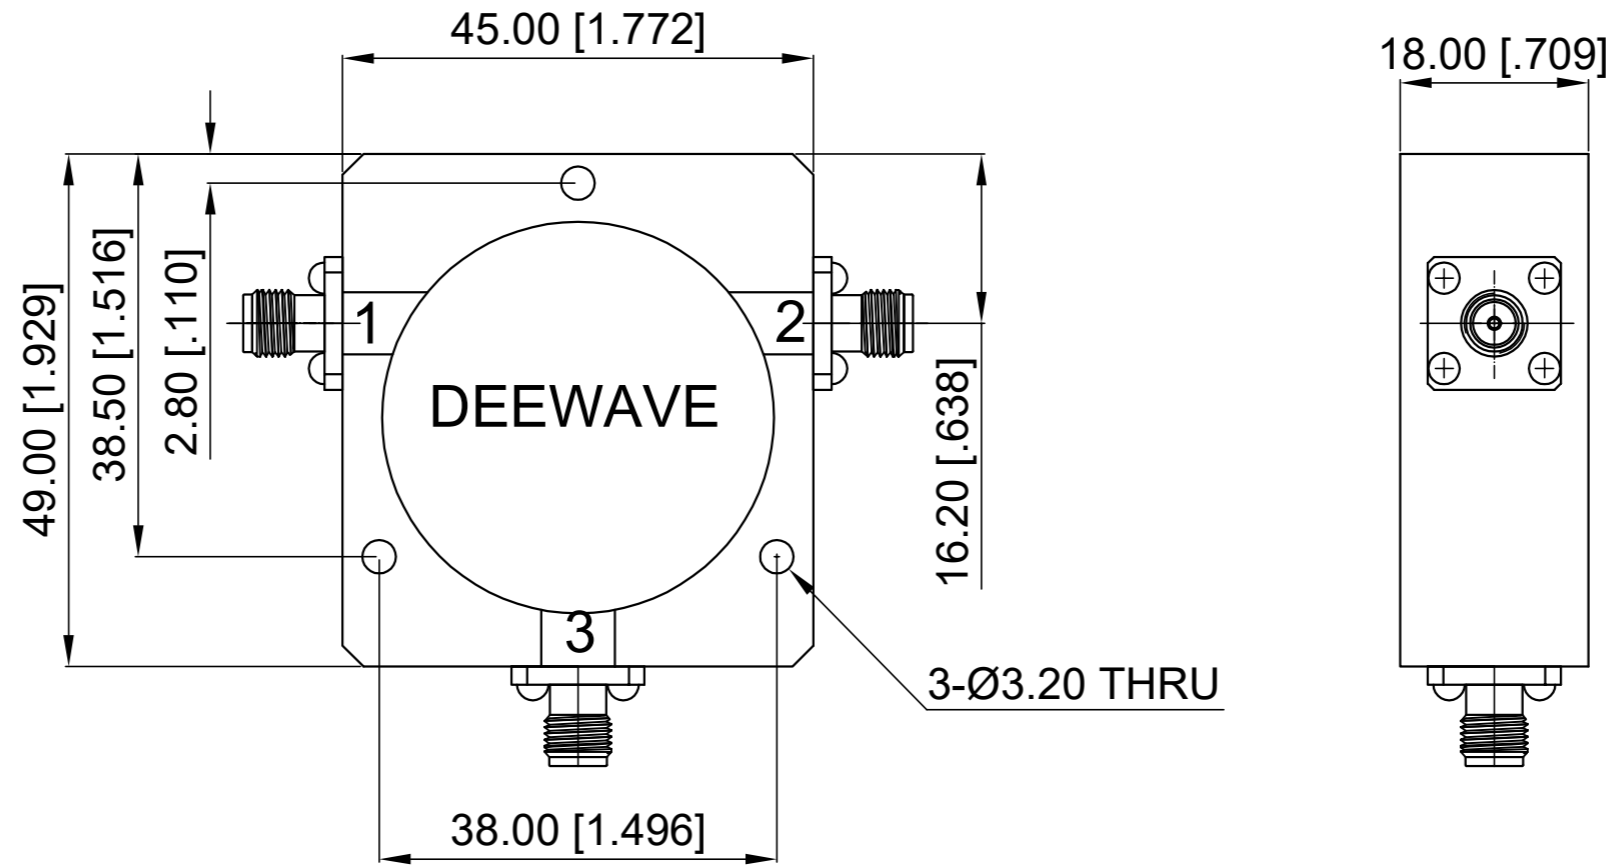


- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
  2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.5.6
Checked:	T. L 2020.5.6
Approved:	A. M 2020.5.6
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 600-900 MHz
Part No:	DCC060090

**DEEWAVE** 

[www.deewave.com](http://www.deewave.com)

View: 

Size:	Scale:	Sheet:	Rev:
A3	1:1	1/1	A