


ELECTRICAL SPECIFICATIONS

Frequency Range: 700-1000 MHz
 Impedance: 50 Ohm
 Insertion Loss: 0.60 dB max.
 Isolation: 18 dB min.
 VSWR: 1.30 max.
 Forward Power: 100 W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.10.8	A. M
B	Height Dimension Changed	2023.6.27	A. M

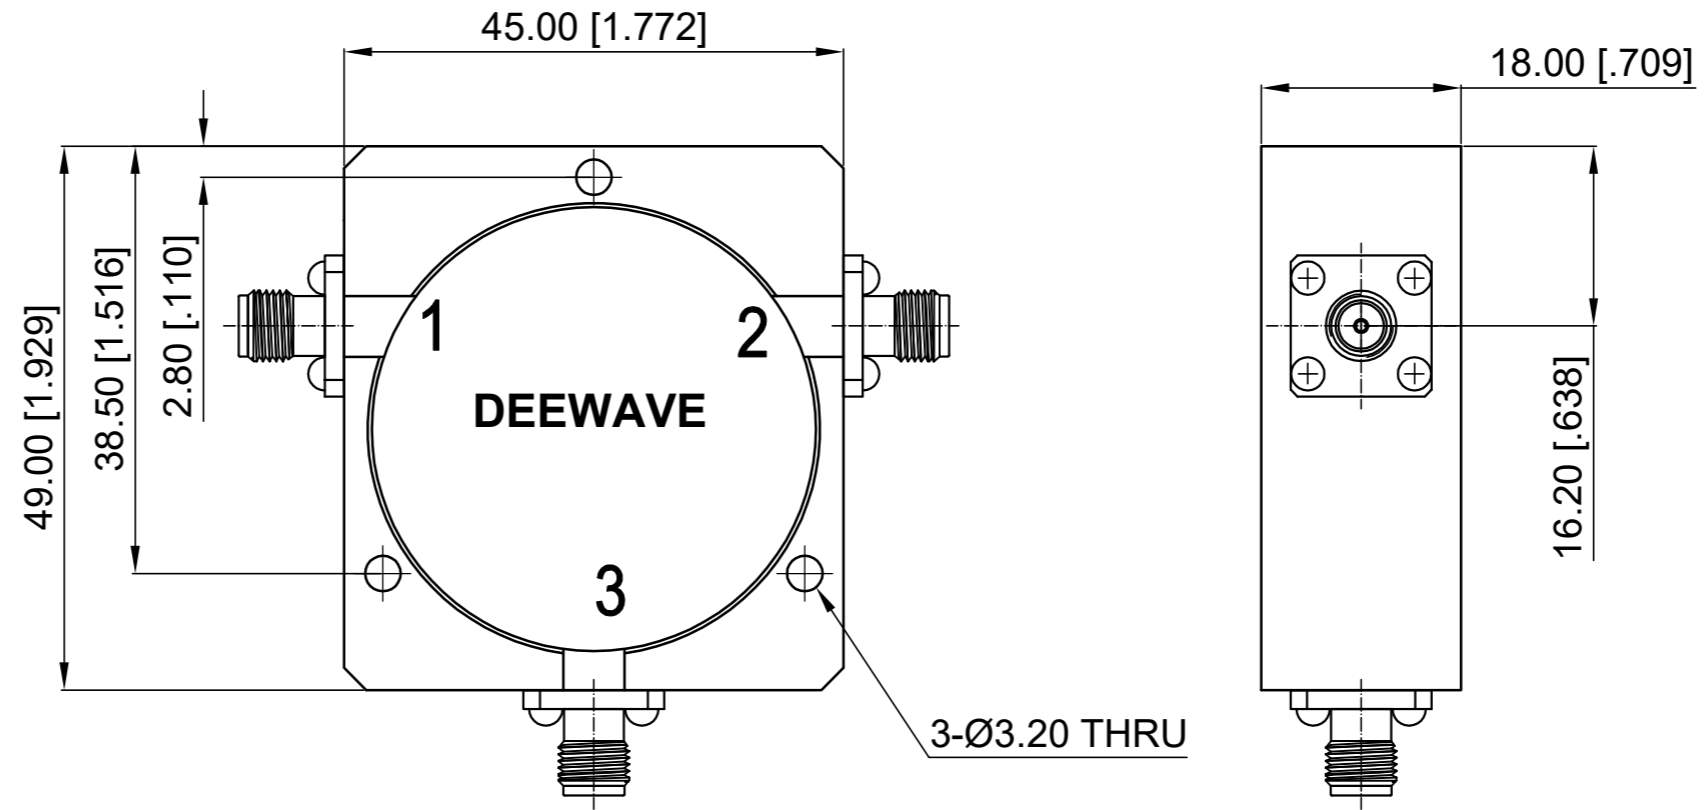

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2023.6.27
Checked:	T. L 2023.6.27
Approved:	A. M 2023.6.27
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 700-1000 MHz
Part No:	DCC070100



View:	
Size:	A3
Scale:	1.5:1
Sheet:	1/1
Rev:	B