

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 746-787 MHz

Impedance: 50 Ohm


Insertion Loss: 0.30 dB max.

Isolation: 23 dB min.

VSWR: 1.20 max.

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.11.25	A. M

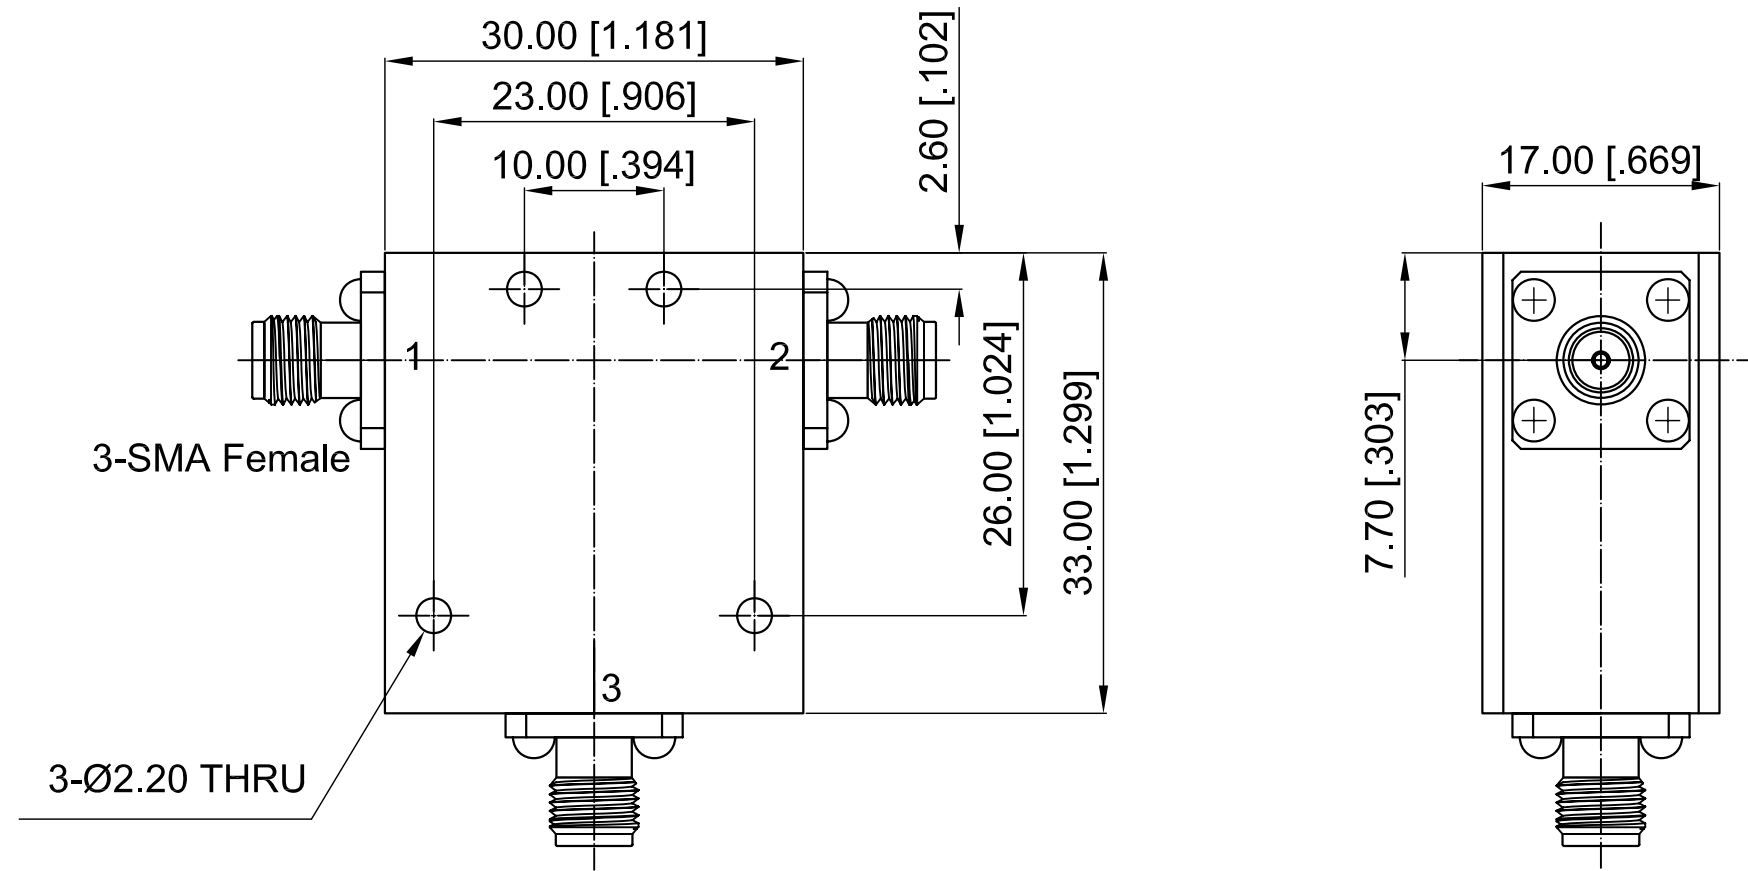

1

NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.11.25
Checked:	T. L 2014.11.25
Approved:	A. M 2014.11.25
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Circulator Freq 746-787 MHz
Part No:	DCC074078

**DEEWAVE**  
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------