


ELECTRICAL SPECIFICATIONS

Frequency Range: 0.8-2.0 GHz
 Impedance: 50 Ohm
 Insertion Loss: 1.30 dB max.
 Isolation: 13 dB min.
 VSWR: 1.60 max.
 Forward Power: 100 W
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.2.27	A. M
B	Outline Updated	2021.8.22	A. M

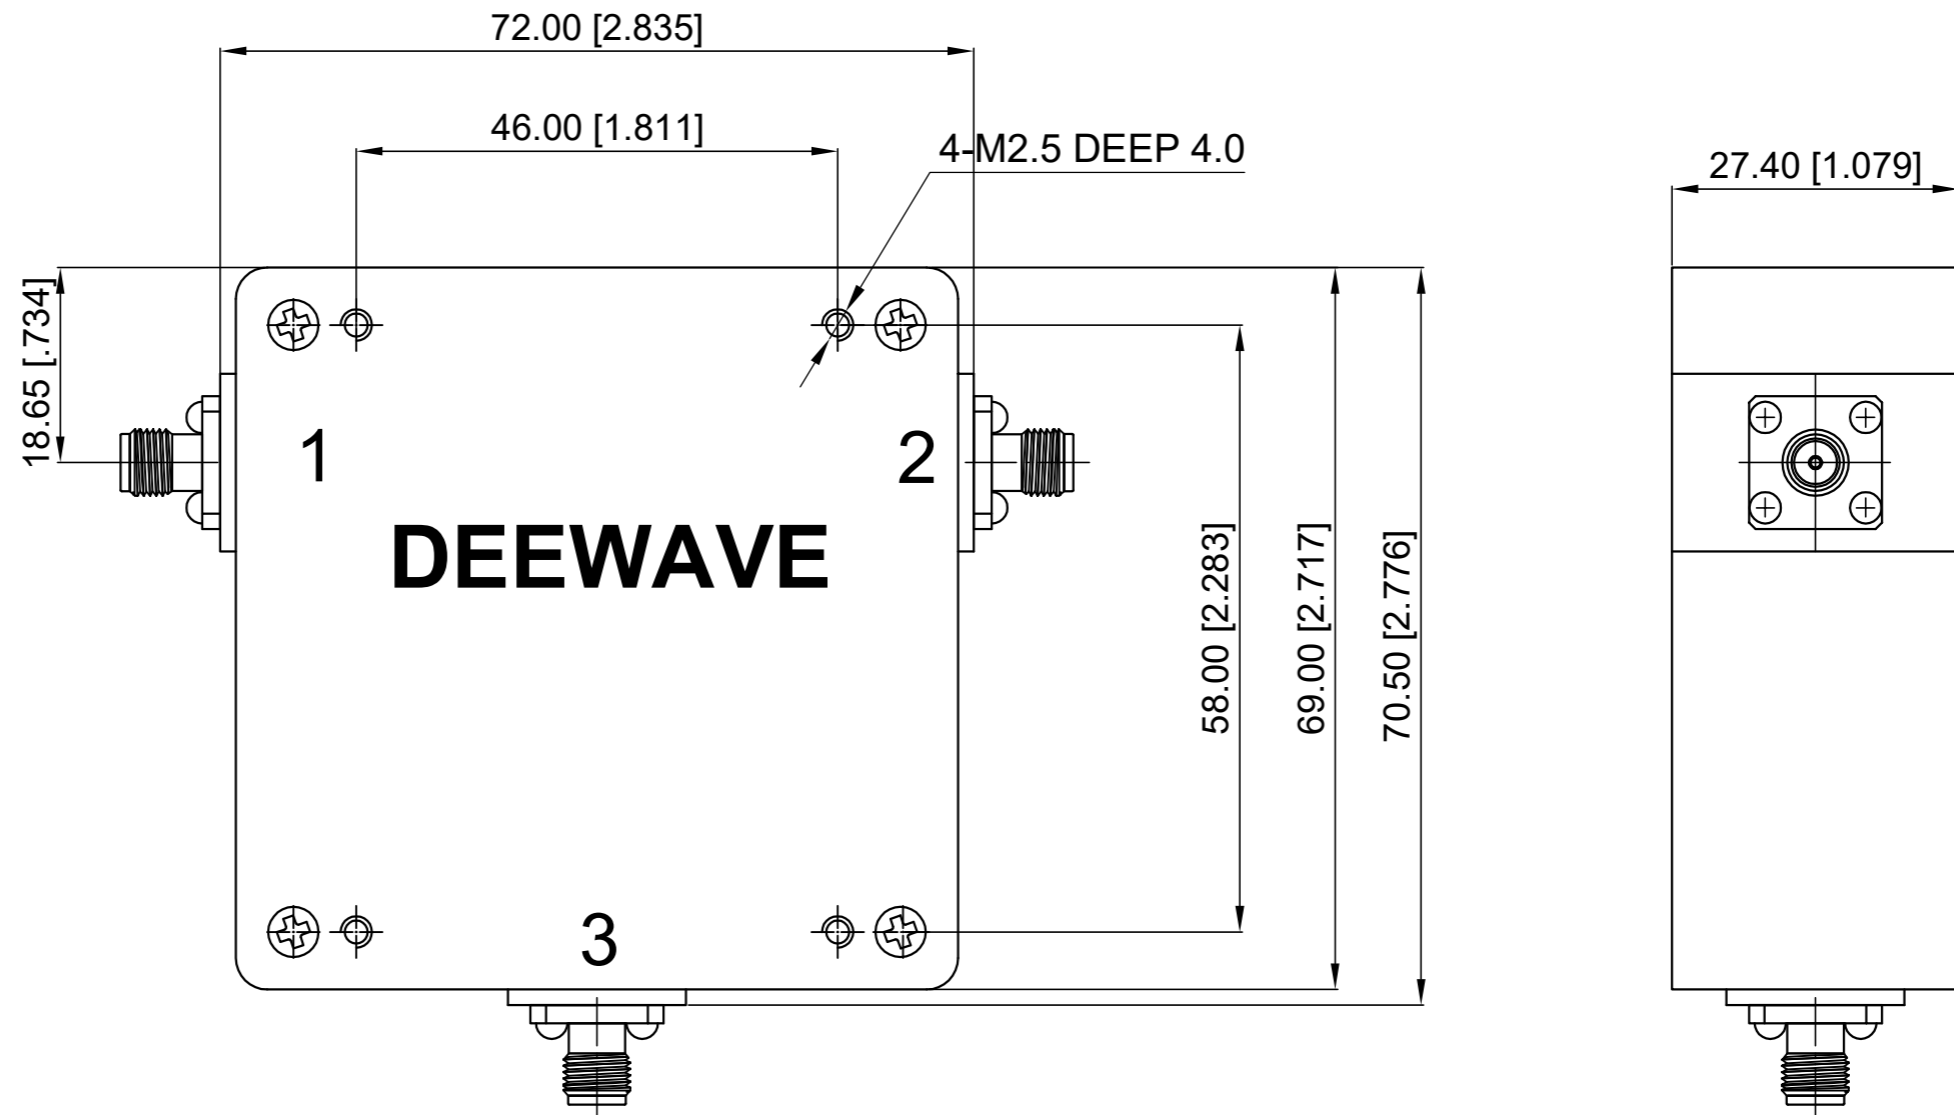

- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2021.8.22
Checked:	T. L 2021.8.22
Approved:	A. M 2021.8.22
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 0.8-2.0 GHz
Part No:	DCC080200B

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 1:1	Sheet: 1/1	Rev: B
----------	------------	------------	--------