

6

5

4

3


2

1

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.5.13	A. M

**ELECTRICAL SPECIFICATIONS**

Frequency Range: 1.7-2.4 GHz  
 Impedance: 50 Ohm  
 Insertion Loss: 0.60 dB max.  
 Isolation: 18 dB min.  
 VSWR: 1.35 max.  
 Forward Power: 10 W  
 Direction: Clockwise

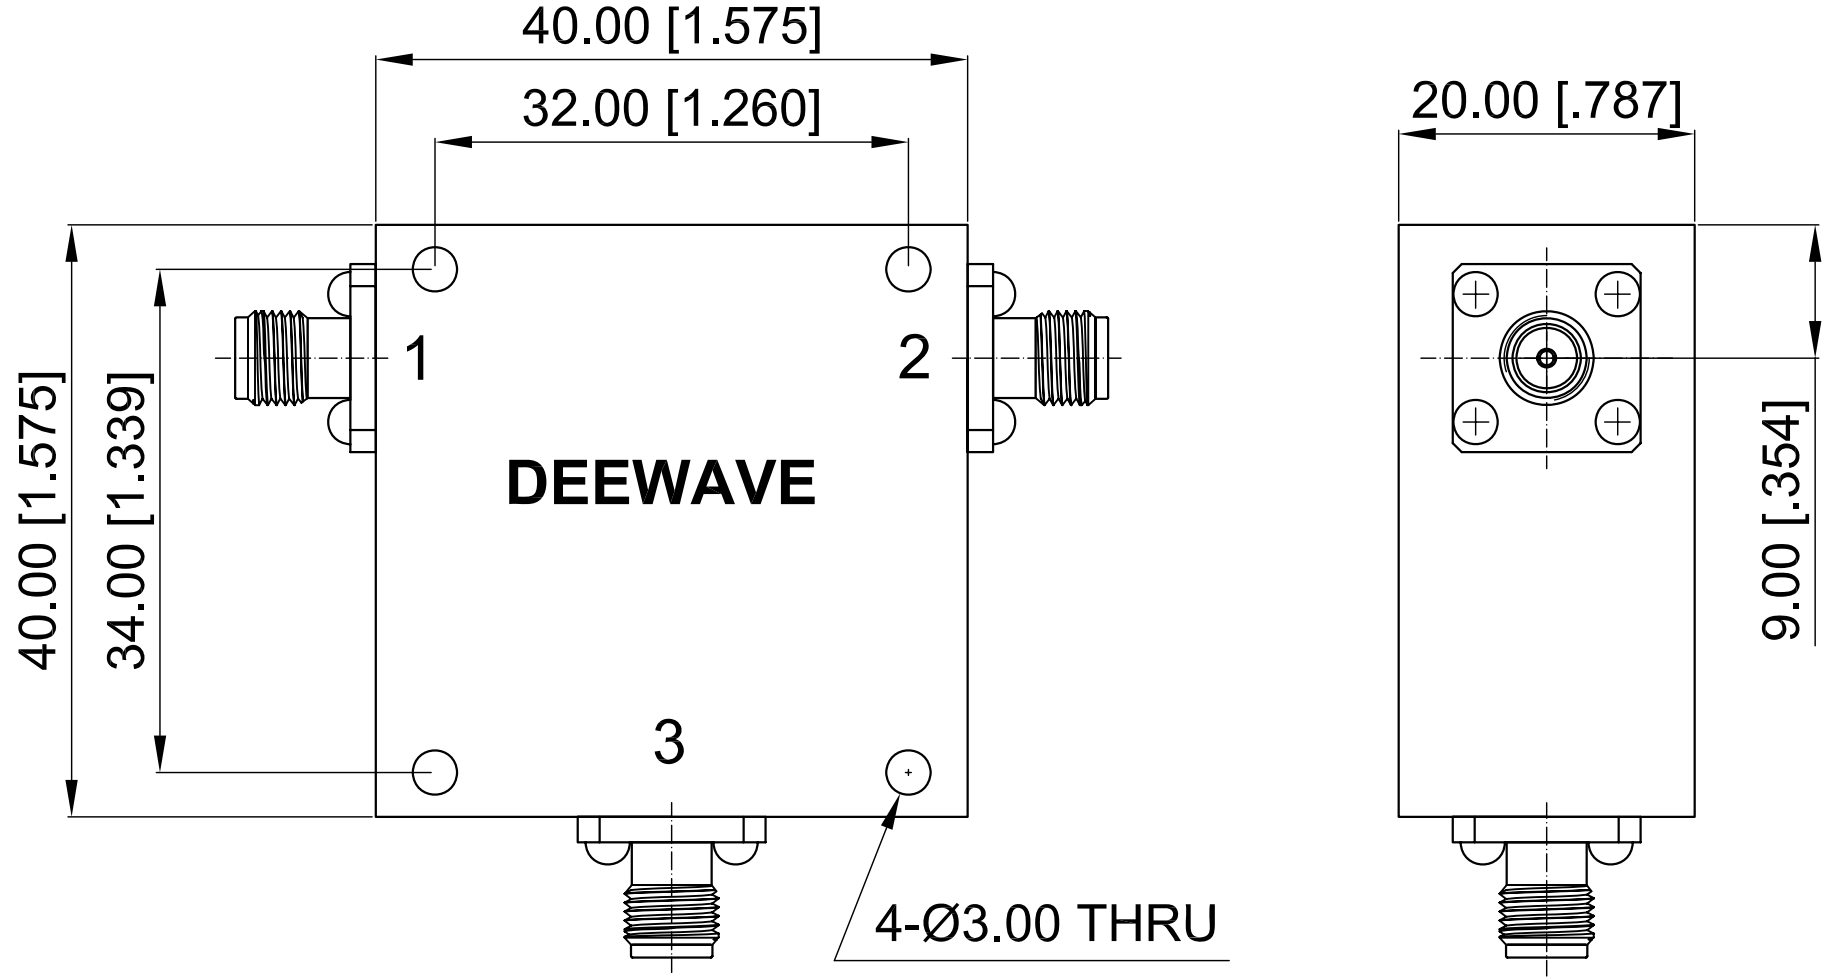

F

E

D

C

B

A

F

E

D

C

B

A

**NOTES:**

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.5.13
Checked:	T. L 2015.5.13
Approved:	A. M 2015.5.13
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Circulator Freq 1.7-2.4 GHz
Part No:	DCC170240

**DEEWAVE**  
www.deewave.com

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------

6

5

4

3

2

1