


**ELECTRICAL SPECIFICATIONS**

Frequency Range: 90-130 MHz  
 Impedance: 50 Ohm  
 Insertion Loss: 1.8 dB max.  
 Isolation: 16 dB min.  
 VSWR: 1.40 max.  
 Forward Power: 20 W  
 Reserve Power: 10 W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2019.12.5	A. M

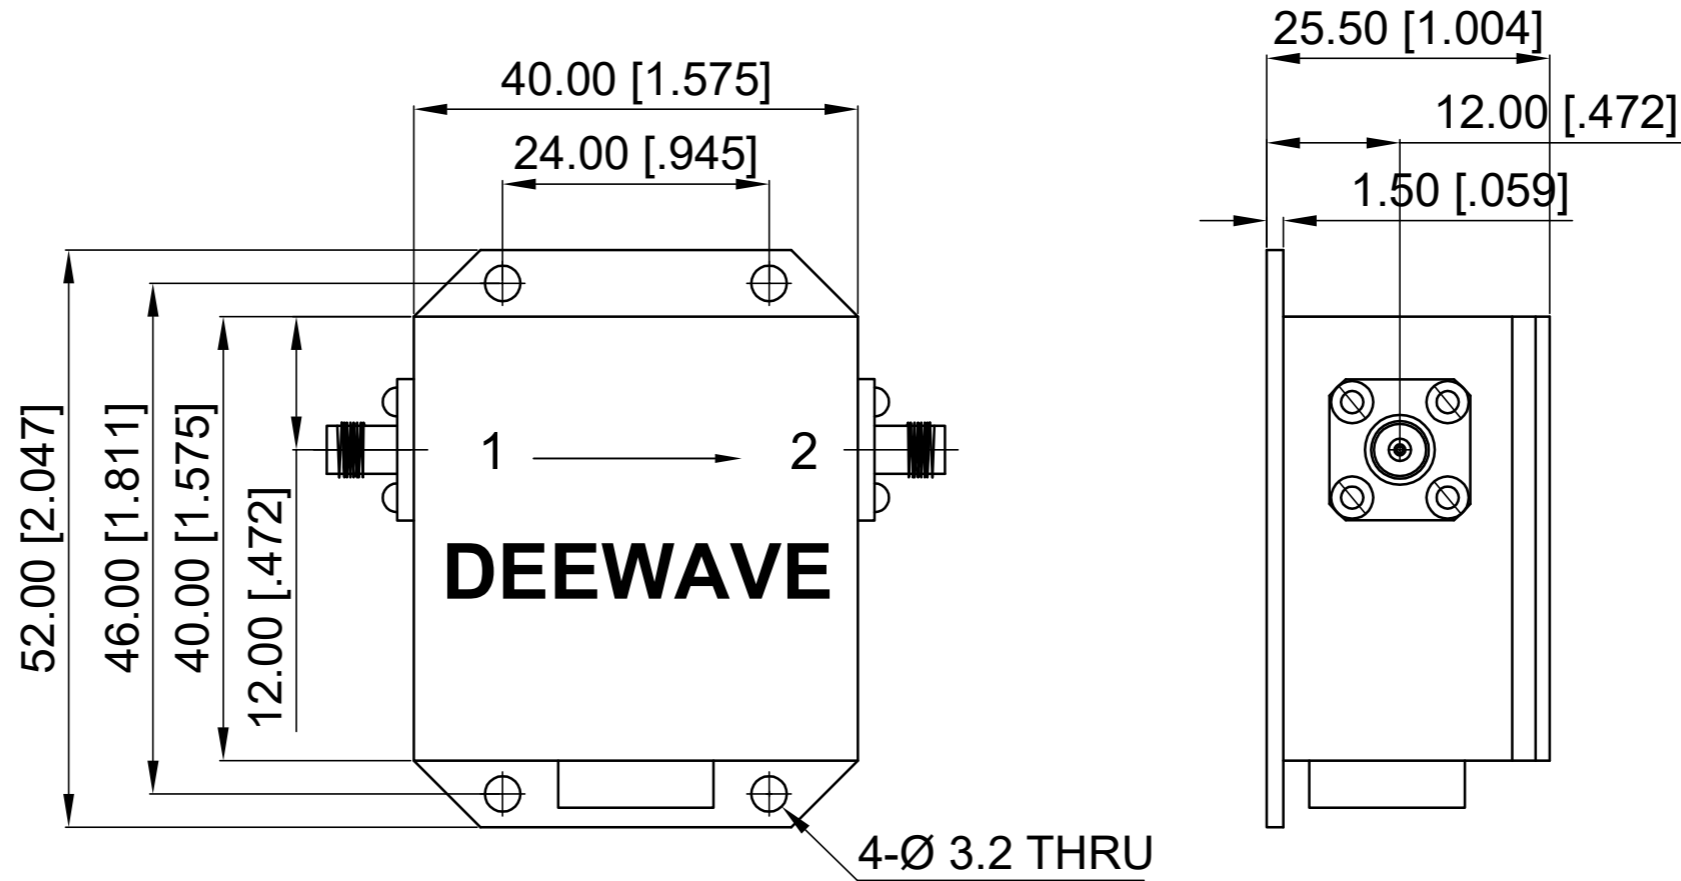

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2019.12.5
Checked:	T. L 2019.12.5
Approved:	A. M 2019.12.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 90-130 MHz
Part No:	DCI009013



View:	
Size:	A3
Scale:	1.5:1
Sheet:	1/1
Rev:	A