


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.9.19	A. M

ELECTRICAL SPECIFICATIONS
 Frequency Range: 0.95-1.80 GHz
 Insertion Loss: 0.80 dB max.
 Isolation: 17 dB min.
 VSWR: 1.45 max.
 Forward power: 50W
 Reverse power: 10W (Peak 50W)

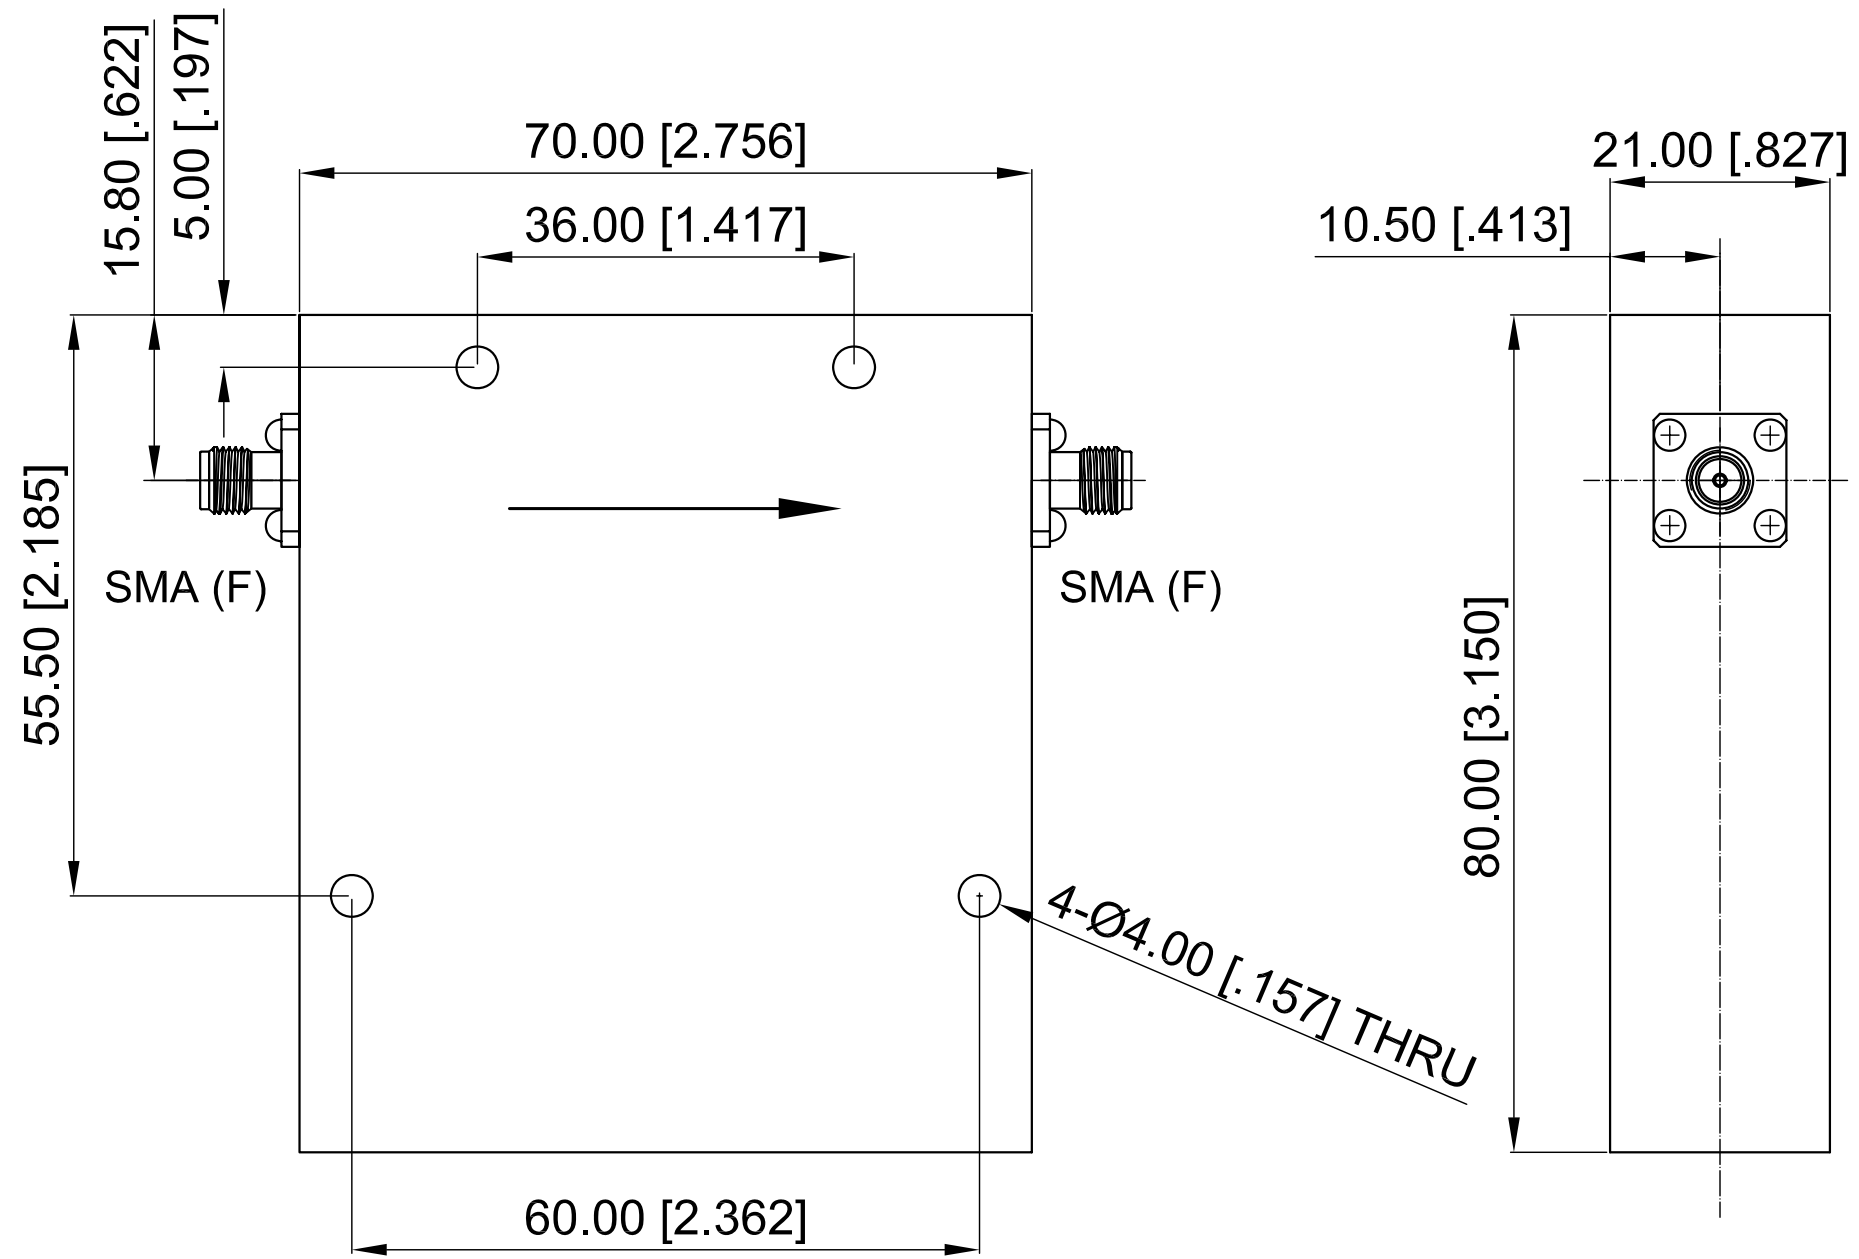

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.9.19
Checked:	T. L 2014.9.19
Approved:	A. M 2014.9.19
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Coaxial Isolator Freq 0.95-1.80 GHz
Part No:	DCI095180



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	A