

# ELECTRICAL SPECIFICATIONS

Frequency Range: 10.7-12.75 GHz

Impedance: 50 Ohm

Insertion Loss: 0.4 dB max.

Isolation: 20 dB min.


VSWR: 1.25 max.

Forward Power: 30 W

Reserve Power: 10 W

Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2019.3.29	A. M

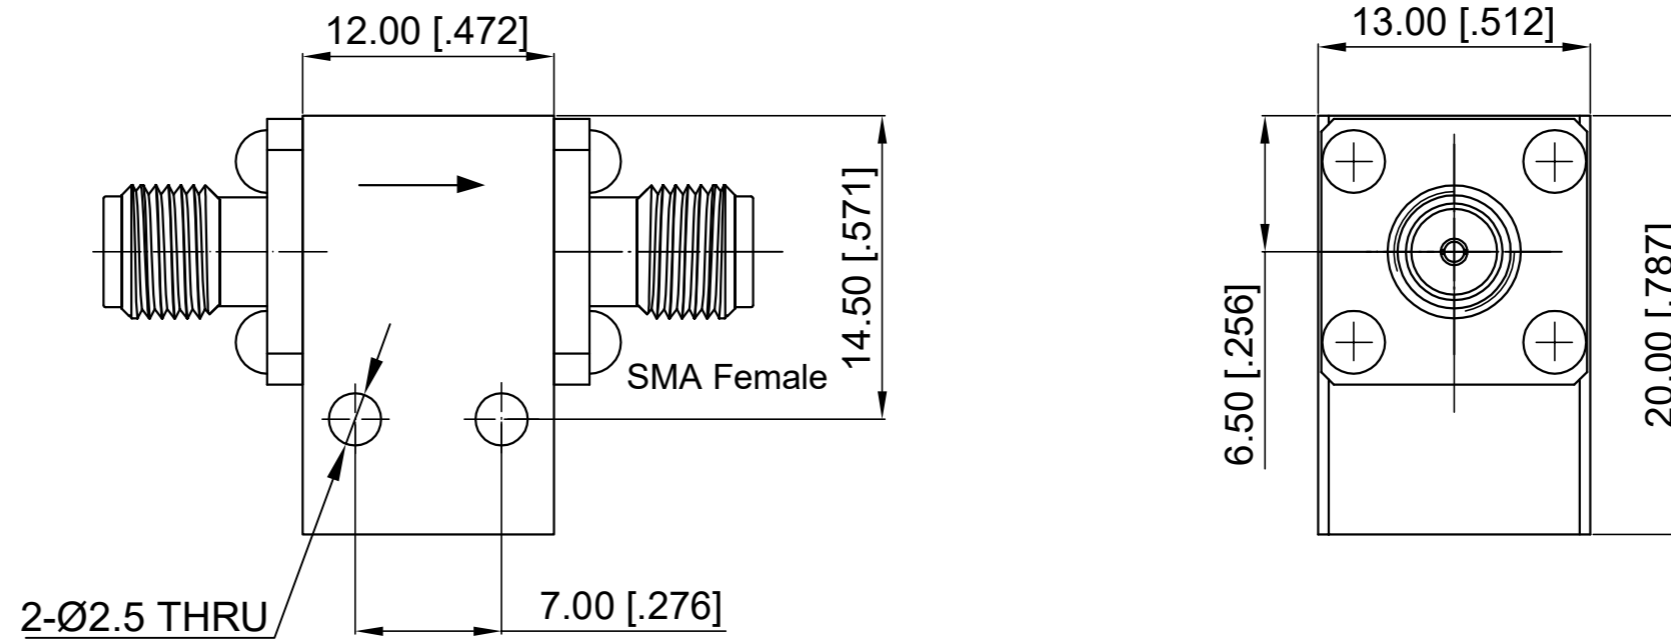

## NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2019.3.29
Checked:	T. L 2019.3.29
Approved:	A. M 2019.3.29
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 10.7-12.75 GHz
Part No:	DCI10701275



View:	
Size:	A3
Scale:	4:1
Sheet:	1/1
Rev:	A