


ELECTRICAL SPECIFICATIONS

Frequency Range: 5-10 GHz
 Impedance: 50 Ohm
 Insertion Loss: 0.60 dB max.
 Isolation: 18 dB min.
 VSWR: 1.30 max.
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2017.10.23	A. M

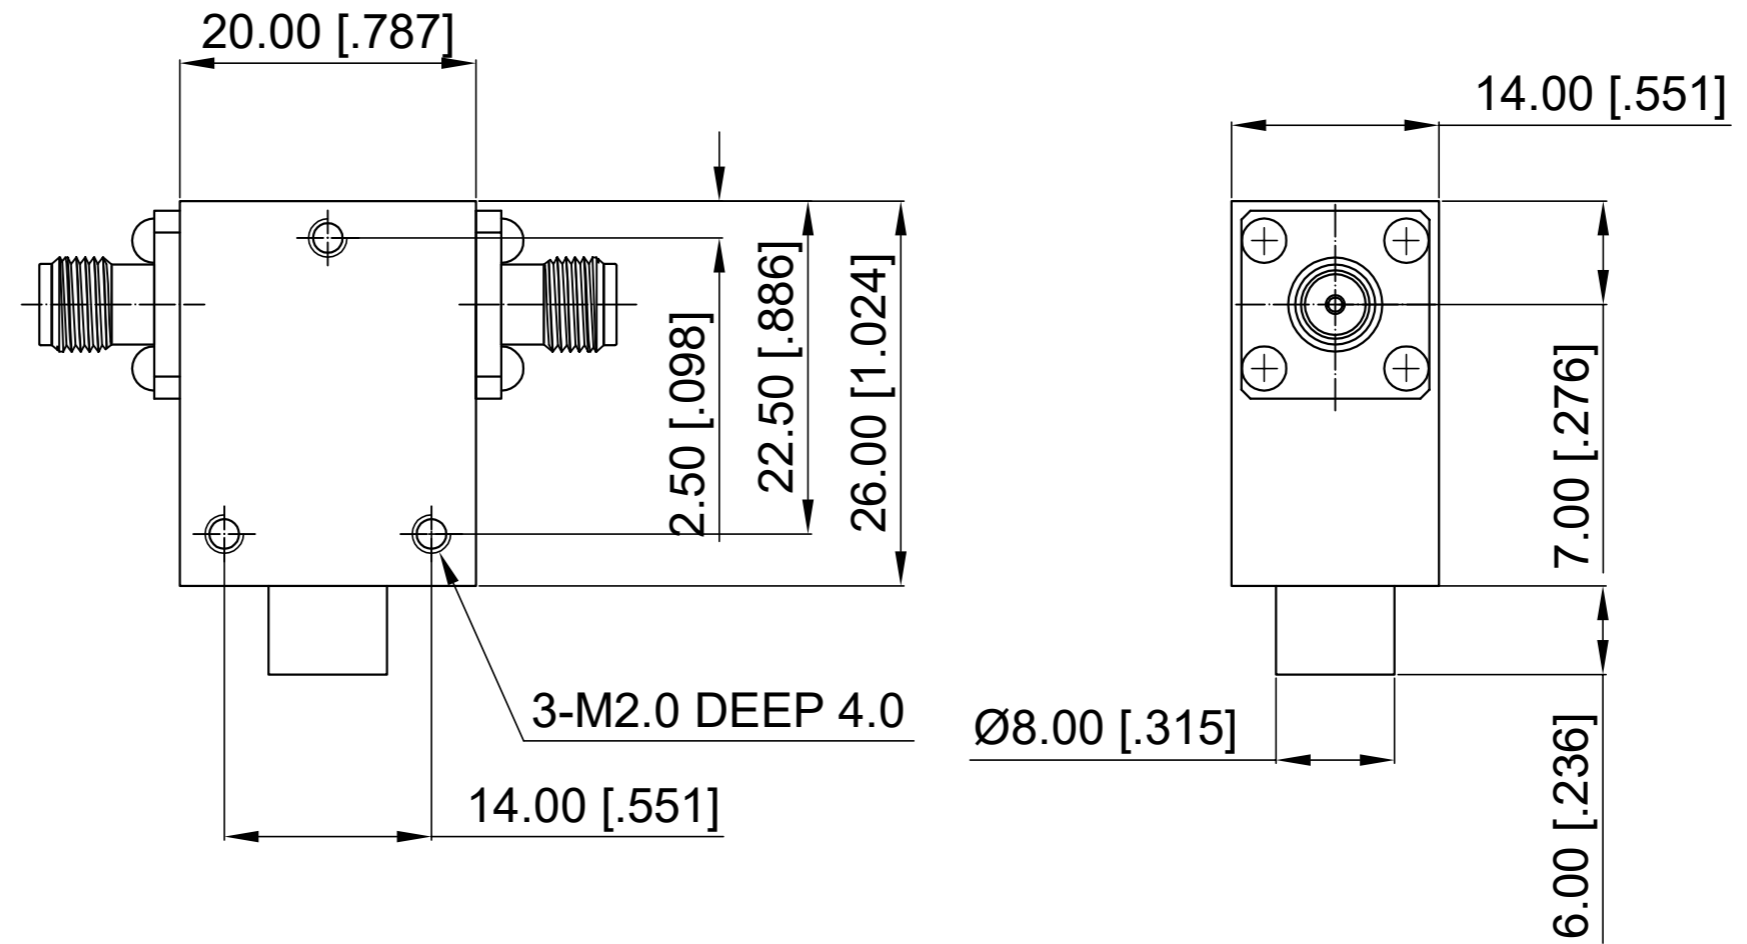

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2017.10.23
Checked:	T. L 2017.10.23
Approved:	A. M 2017.10.23
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] .X° ±1° X° ±2°	

Title:	SMA Female Isolator Freq 5-10 GHz
Part No:	DCI5001000B

DEEWAVE
www.deewave.com

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------