

ELECTRICAL SPECIFICATIONS

Frequency Range: 130-180 MHz

Insertion Loss : 0.7 dB Max.

Isolation : 20 dB Min.


VSWR: 1.25 Max.

Forward Power: 100 W

Direction: Clockwise

Operation Temp.: 0~+60°C

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.10.31	A. M

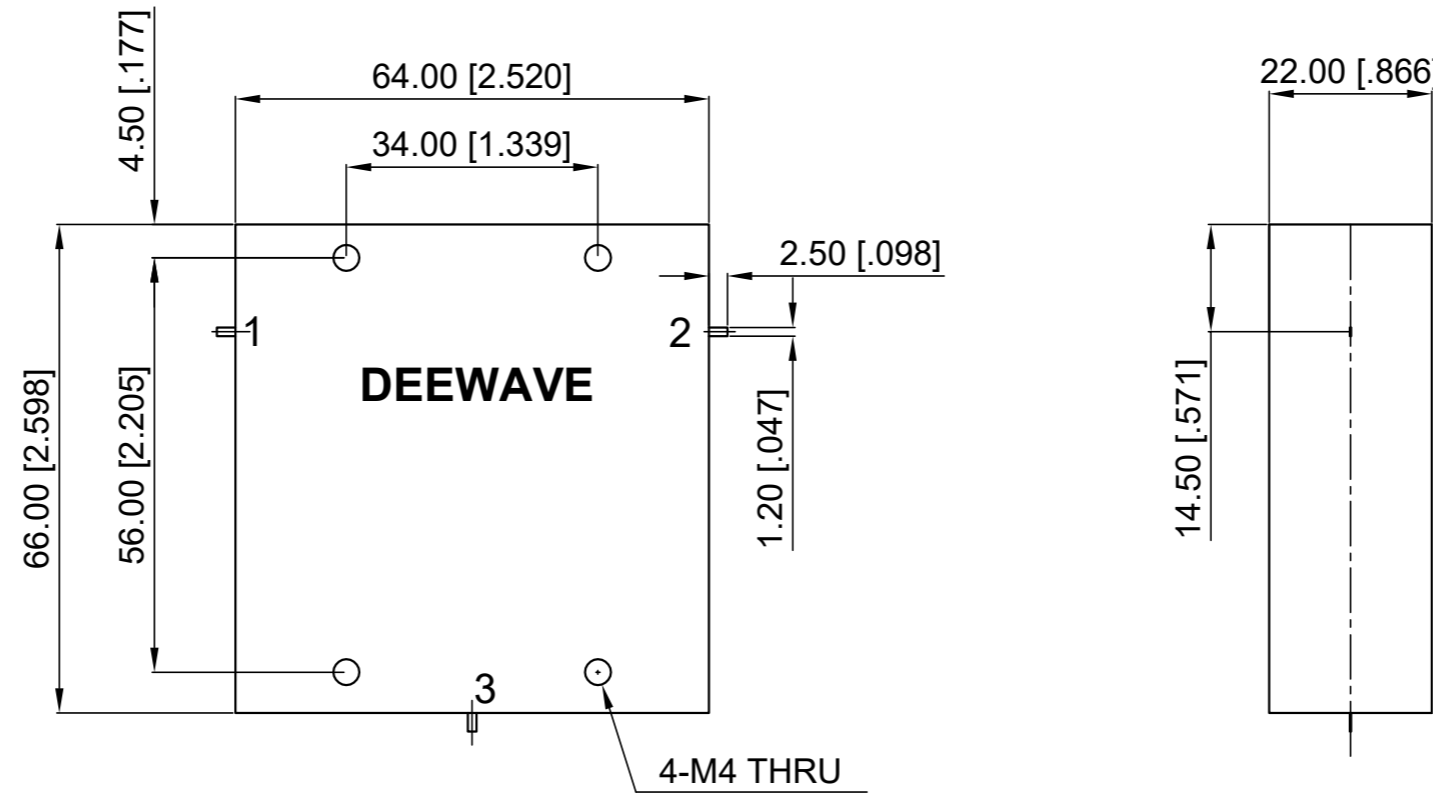

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.10.31
Checked:	T. L 2015.10.31
Approved:	A. M 2015.10.31
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 130-180 MHz
Part No:	DDC013018



View:	
Size:	A3
Scale:	1:1
Sheet:	1/1
Rev:	A