


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.5.8	A. M

ELECTRICAL SPECIFICATIONS
 Frequency Range: 1700-2700 MHz
 Insertion Loss: 0.7 dB max.
 Isolation: 17 dB min.
 VSWR: 1.35 max.
 Forward Power: 100 W
 Direction: Clockwise

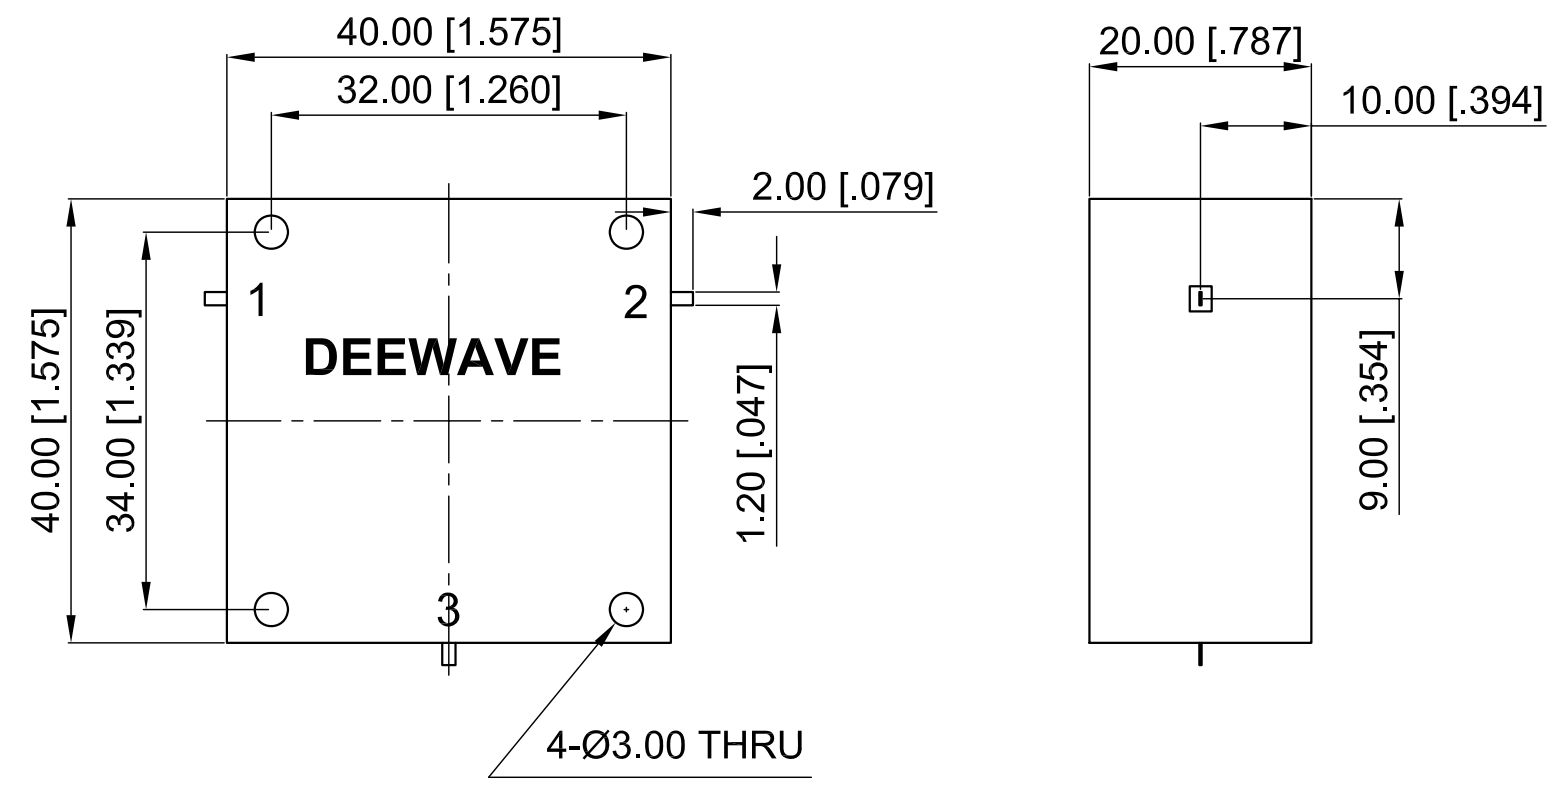

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.5.8
Checked:	T. L 2015.5.8
Approved:	A. M 2015.5.8
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Circulator Freq 1700-2700 MHz
Part No:	DDC170270

DEEWAVE
www.deewave.com

View:

Size:	Scale:	Sheet:	Rev:
A3	1.5:1	1/1	A