


Product Model: Drop-in Isolator  
 Frequency Range (GHz): 0.495-0.550GHz  
 Insertion Loss : 0.90 dB Max.  
 Isolation : 18 dB Min.  
 VSWR: 1.30 Max.  
 Forward Power: 10W  
 Reverse Power: 2W

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2014.8.21	A. M

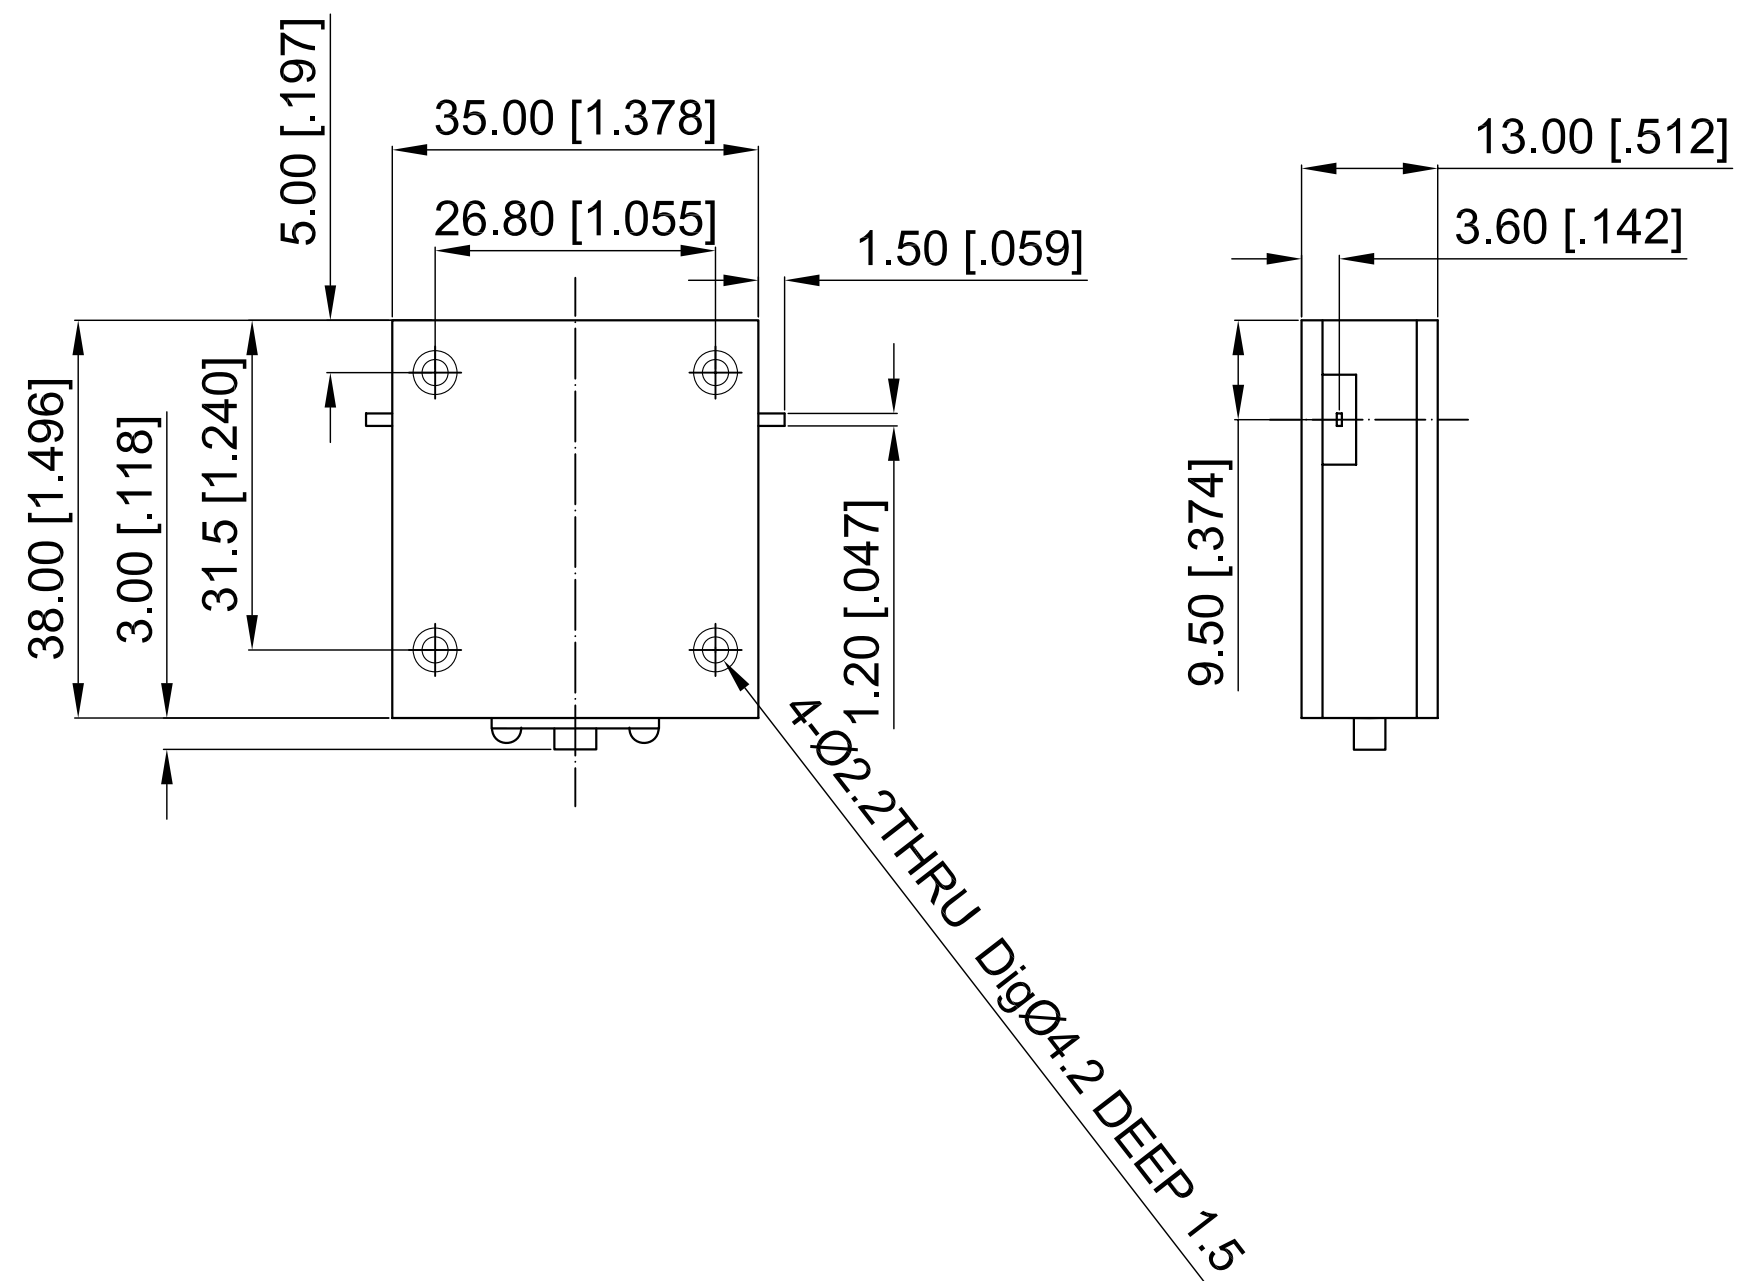

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.8.21
Checked:	T. L 2014.8.21
Approved:	A. M 2014.8.21
<small>Unless Otherwise Specified Dimensions are in Millimeters,          Dimensions in [ ] are in Inches for Customer Reference Only.          Unless Otherwise Specified Tolerance are:          .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"]          .X° ±1° X° ±2°</small>	

Title:	<b>Drop-in Isolator 0.495-0.550GHz</b>
Part No:	<b>DDI049055</b>

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size: A3	Scale: 2:1	Sheet: 1/1	Rev: A
----------	------------	------------	--------