

6

5

4

3


2

1

Revisions

Rev	Description	Date	Approved:
A	Initial Release	2014.3.5	A. M

ELECTRICAL SPECIFICATIONS
 Frequency Range: 1710-1785 MHz
 Insertion Loss: 0.3 dB max.
 Isolation: 23 dB min.
 VSWR: 1.20 max.
 Forward Power: 60 W
 Reverse Power: 10W
 Direction: Clockwise

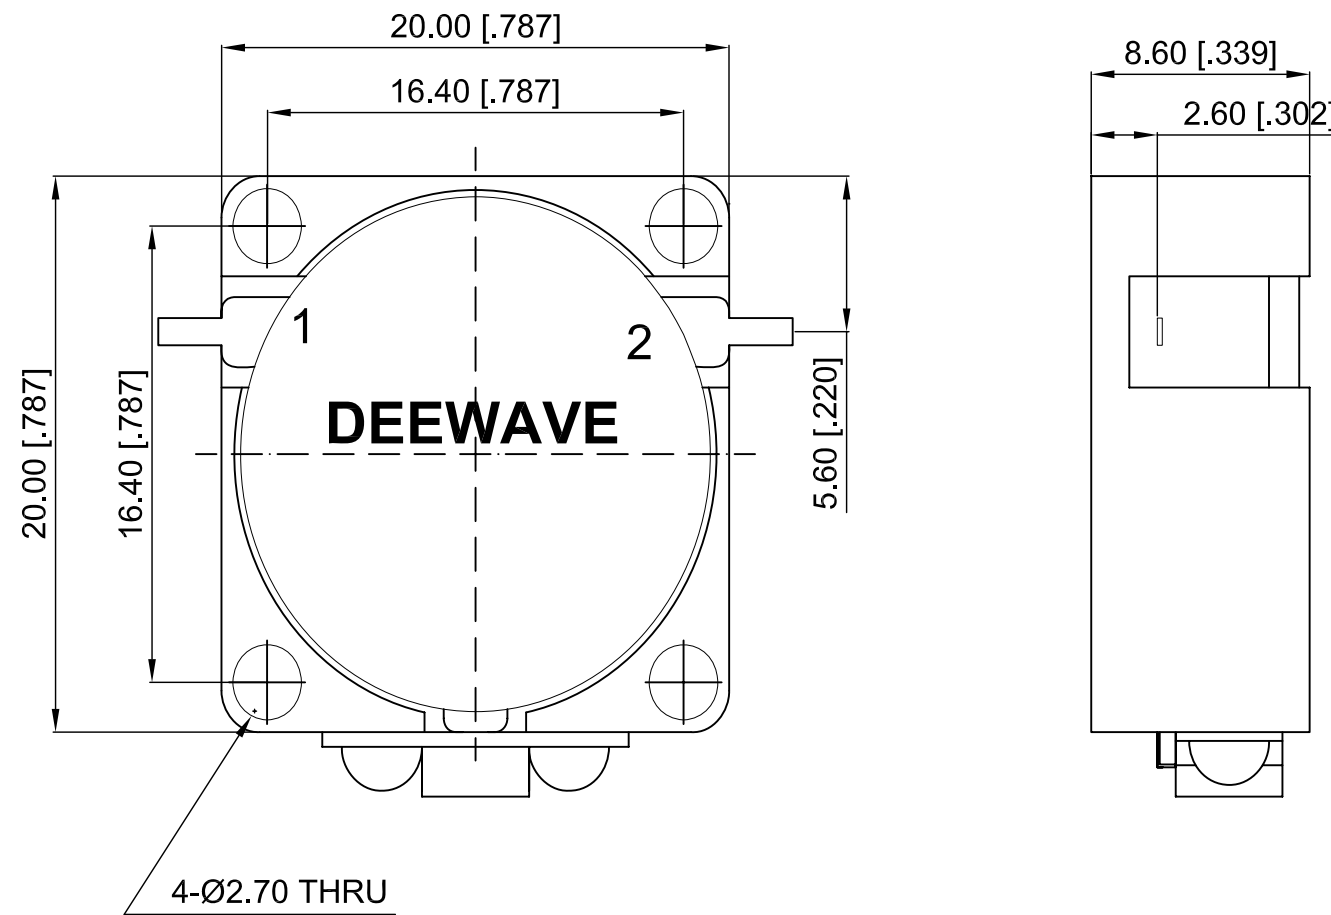

NOTES:
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2014.3.5
Checked:	T. L 2014.3.5
Approved:	A. M 2014.3.5
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 1710-1785 MHz
Part No:	DDI171178



View:	
Size:	A3
Scale:	3:1
Sheet:	1/1
Rev:	A

6

5

4

3

2

1