

ELECTRICAL SPECIFICATIONS

Frequency Range: 23.5-24.5 GHz

Impedance: 50 Ohm

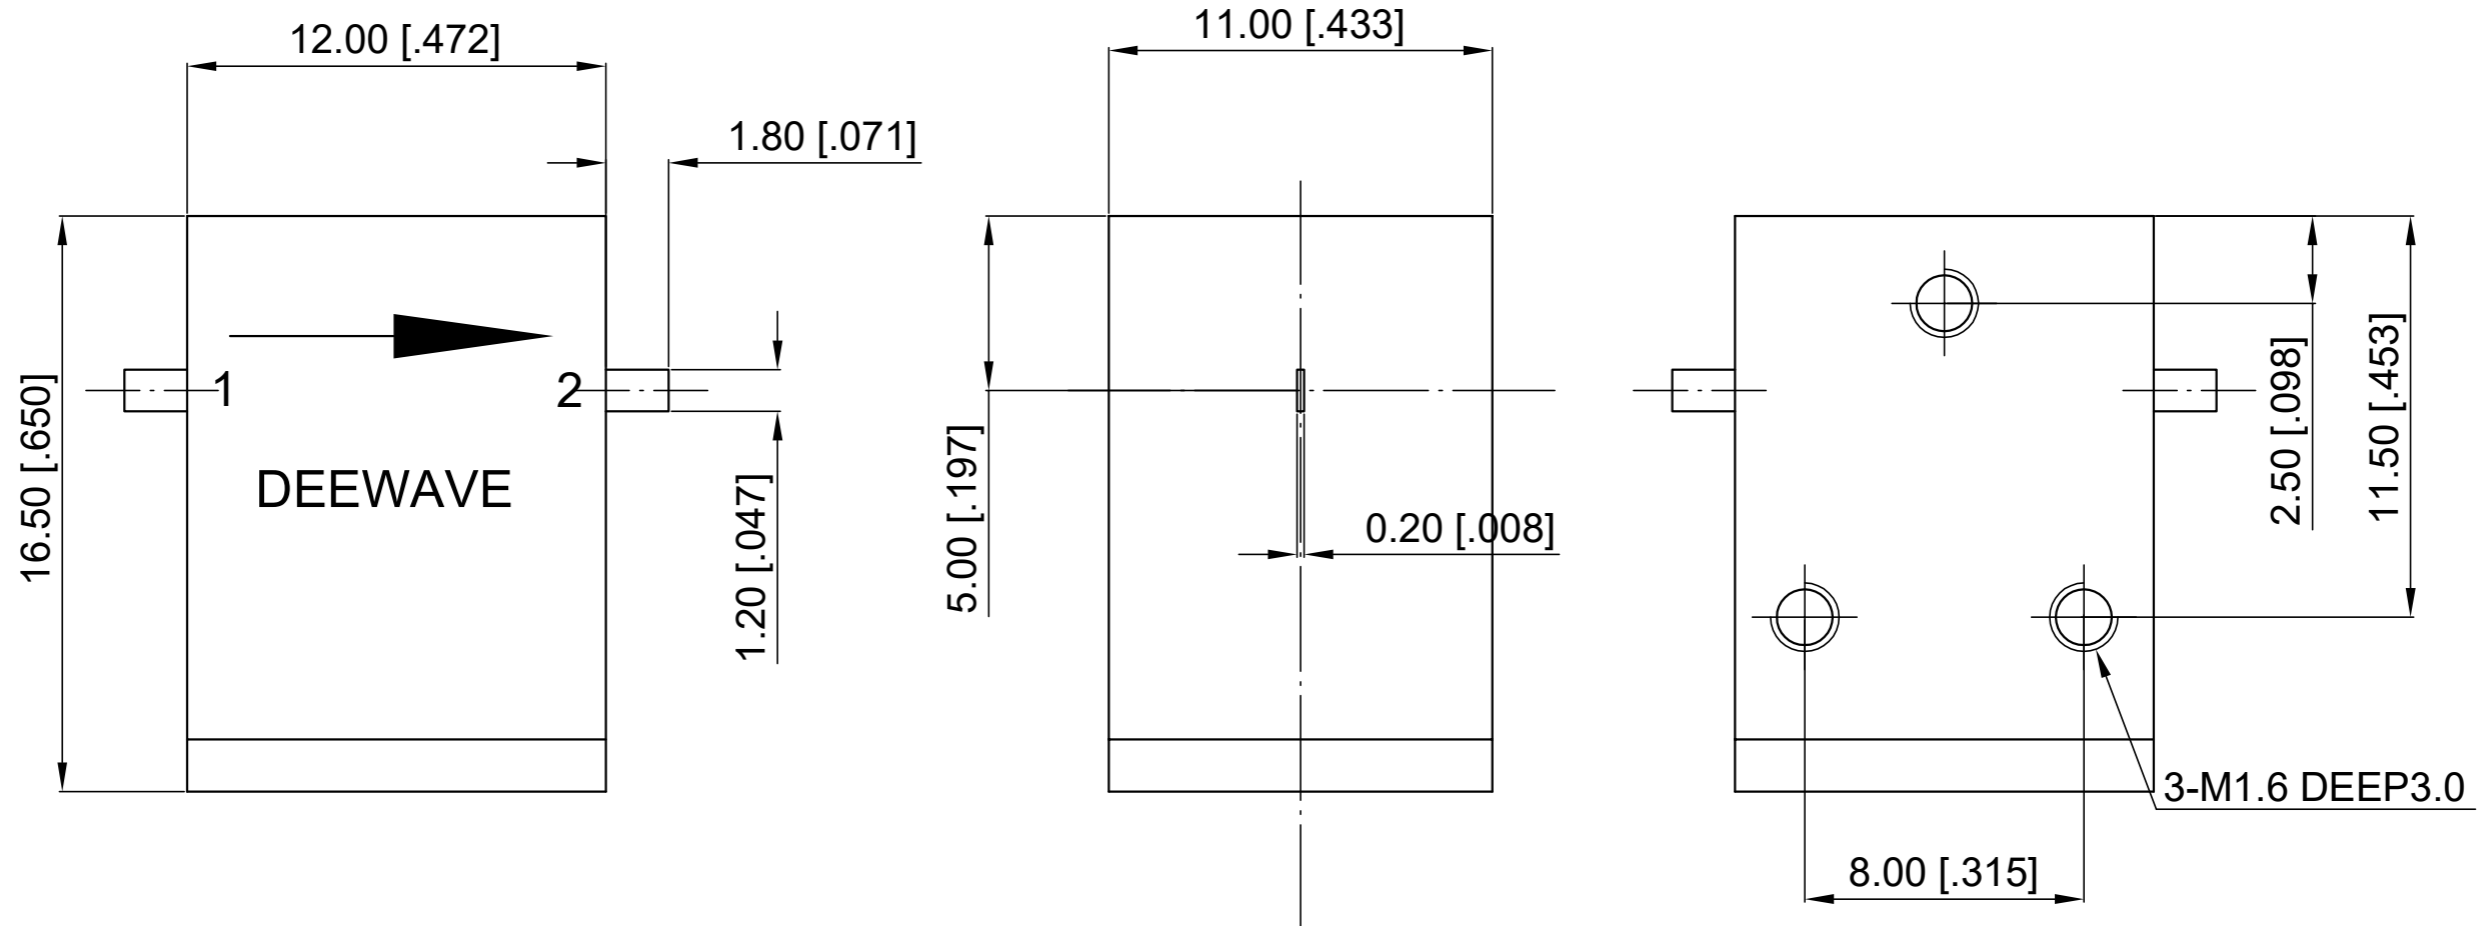
Insertion Loss: 0.6 dB max.

Isolation: 18 dB min.

VSWR: 1.35 max.

Director: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.2.3	A. M





- NOTES:
1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.2.3
Checked:	T. L 2020.2.3
Approved:	A. M 2020.2.3
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 23.5-24.5 GHz
Part No:	DDI23502450

DEEWAVE
www.deewave.com

View:  

Size:	Scale:	Sheet:	Rev:
A3	4:1	1/1	A