

#### Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

#### Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI/PTFE

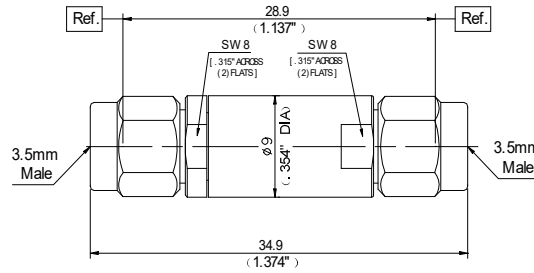

P/N	DIDB241101
Descr.	3.5mm Male to Male inner Block
Freq.	30MHz to 33GHz
VSWR	1.25:1(Max)

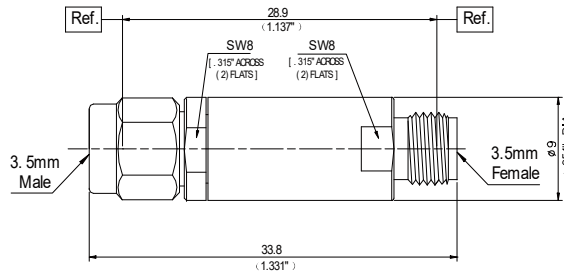

P/N	DIDB241002
Descr.	3.5mm Male to F inner Block
Freq.	30MHz to 33GHz
VSWR	1.25:1(Max)

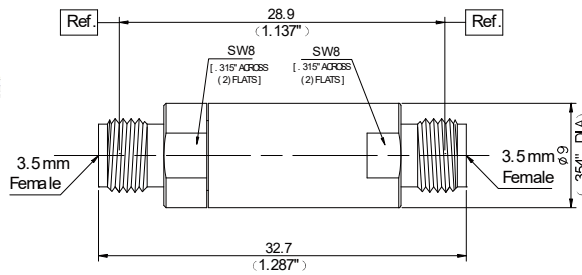

P/N	DIDB240003
Descr.	3.5mm Female to F inner Block
Freq.	30MHz to 33GHz
VSWR	1.25:1(Max)