

Performance Features

Nominal Impedance: 50Ω

Durability: 500 Cycles


Operating Temperature: -55°C~+125°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI/PTFE

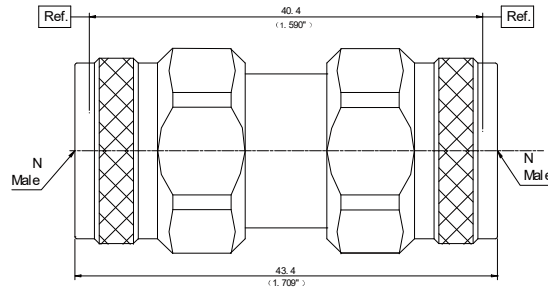

P/N	DIDB281101
Descr.	N Male to N Male inner Block
Freq.	10MHz to 18GHz
VSWR	1.25:1(Max)

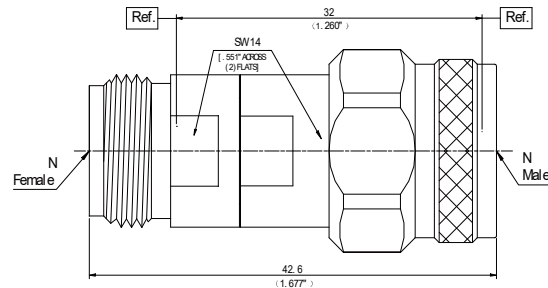

P/N	DIDB281002
Descr.	N Male to N Female inner Block
Freq.	10MHz to 18GHz
VSWR	1.25:1(Max)

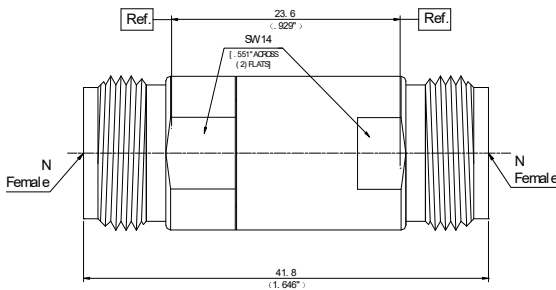

P/N	DIDB280003
Descr.	N Female to N Female inner Block
Freq.	10MHz to 18GHz
VSWR	1.25:1(Max)