

## Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-65 GHz

Durability: 500 Cycles






Operating Temperature: -55°C~+165°C


## Materials/Finishes

Housing: Type 303 Stainless Steel - Polished & Passivated


Center Contact: Beryllium Copper Plated Gold

Insulators: PEI

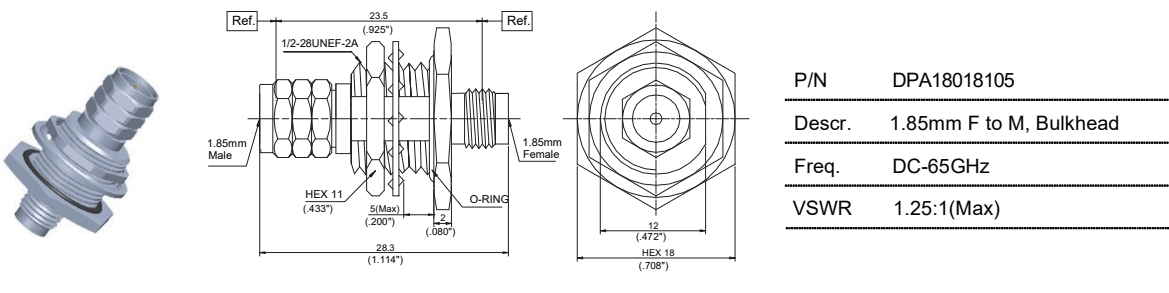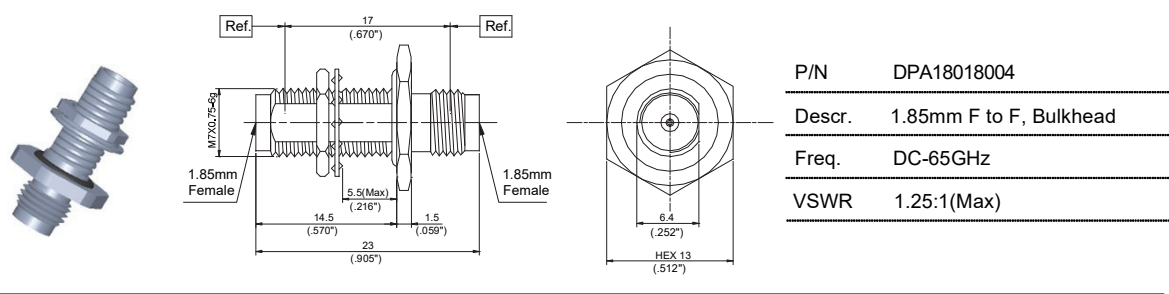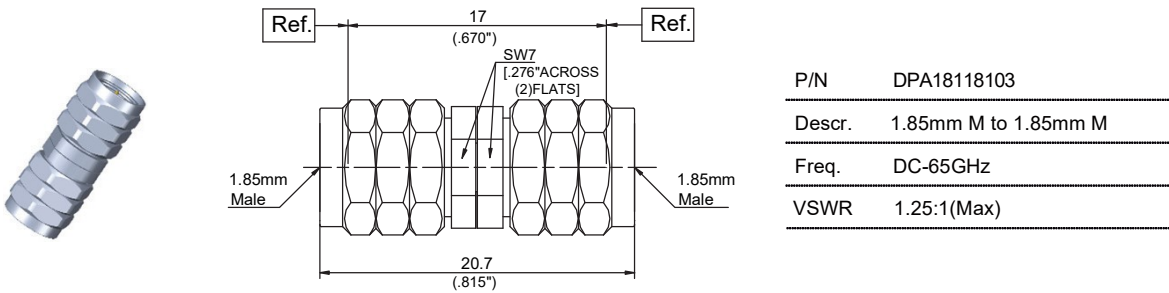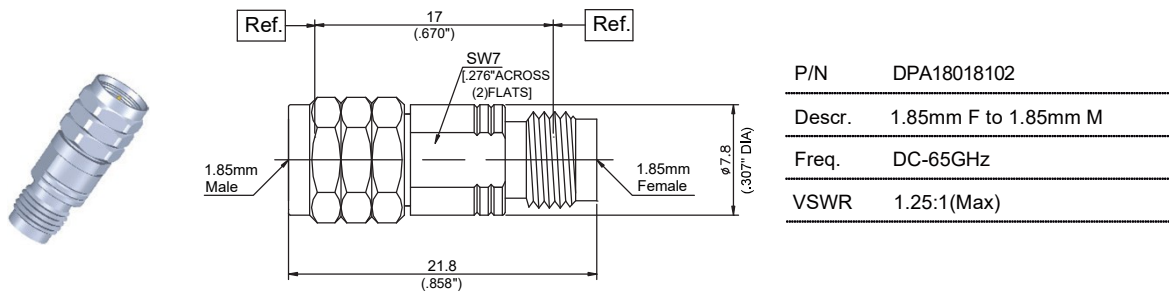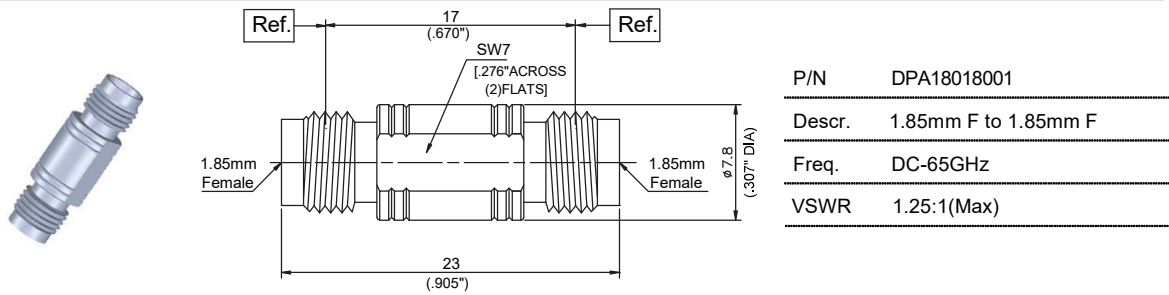


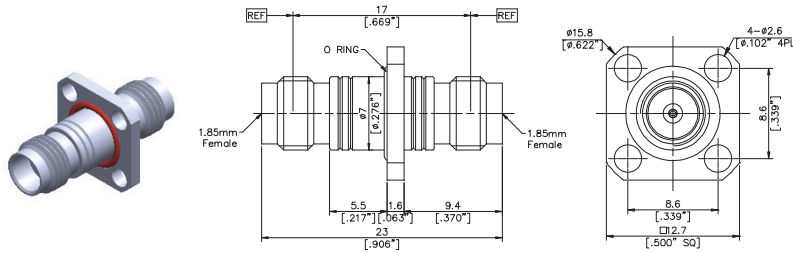


P/N	DPA18018006
Descr.	1.85mm F to F, Bulkhead
Freq.	DC-65GHz
VSWR	1.25:1(Max)

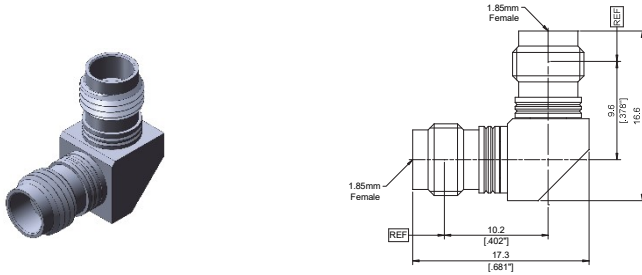

P/N	DPA18018007
Descr.	1.85mm F RA to 1.85mm F
Freq.	DC-65GHz
VSWR	1.40:1(Max)

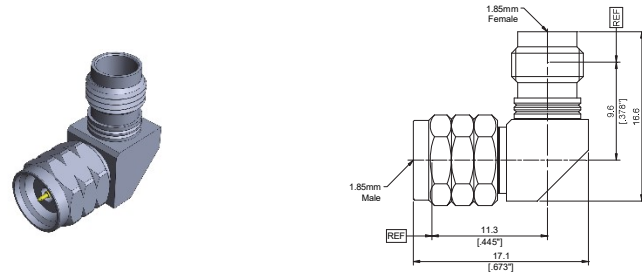

P/N	DPA18018108
Descr.	1.85mm F RA to 1.85mm M
Freq.	DC-65GHz
VSWR	1.40:1(Max)

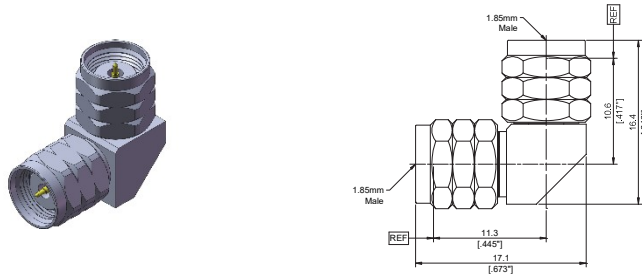

P/N	DPA18118109
Descr.	1.85mm M RA to 1.85mm M
Freq.	DC-65GHz
VSWR	1.40:1(Max)