

Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-27 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

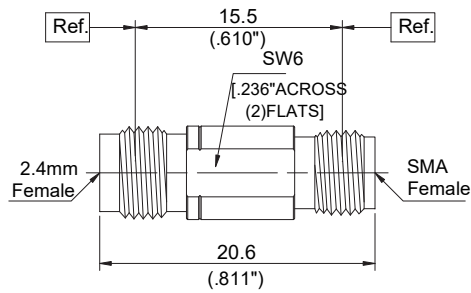


P/N	DPA22025001
Descr.	2.4mm F to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

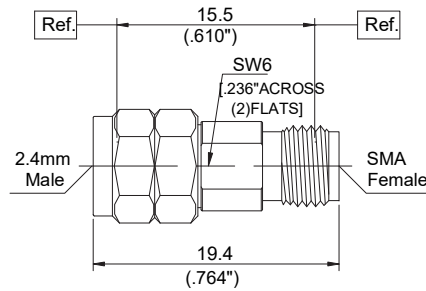

P/N	DPA22125002
Descr.	2.4mm M to SMA F
Freq.	DC-27GHz
VSWR	1.15:1(Max)

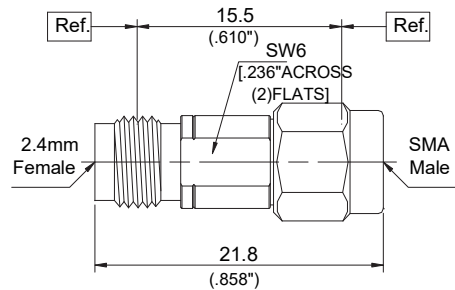

P/N	DPA22025103
Descr.	2.4mm F to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)

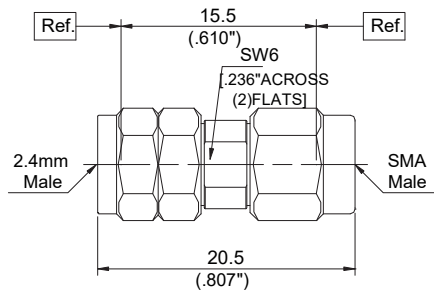

P/N	DPA22125104
Descr.	2.4mm M to SMA M
Freq.	DC-27GHz
VSWR	1.15:1(Max)