


### Performance Features


- Nominal Impedance: 50Ω
- Frequency Range: DC-40 GHz
- Durability: 500 Cycles
- Operating Temperature: -55°C~+165°C

### Materials/Finishes


- Housing: Type 303 Stainless Steel - Polished & Passivated
- Center Contact: Beryllium Copper Plated Gold
- Insulators: PEI

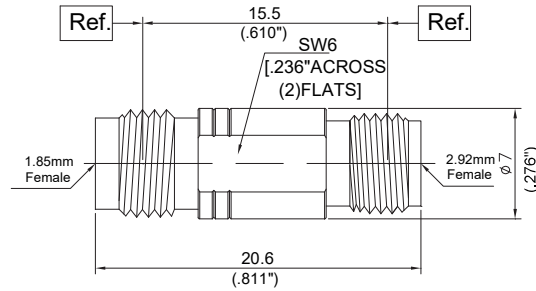


P/N	DPA23018001
Descr.	2.92mm F to 1.85mm F
Freq.	DC-40GHz
VSWR	1.20:1(Max)

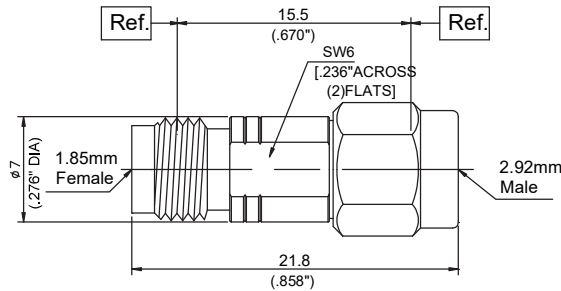

P/N	DPA23118002
Descr.	2.92mm M to 1.85mm F
Freq.	DC-40GHz
VSWR	1.15:1(Max)

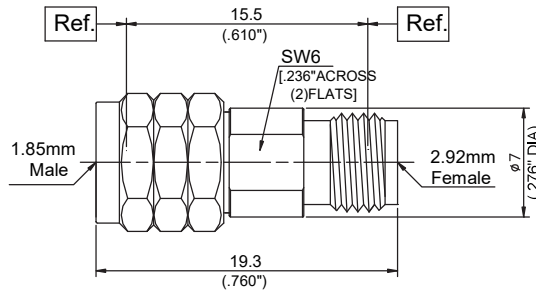

P/N	DPA23018103
Descr.	2.92mm F to 1.85mm M
Freq.	DC-40GHz
VSWR	1.15:1(Max)

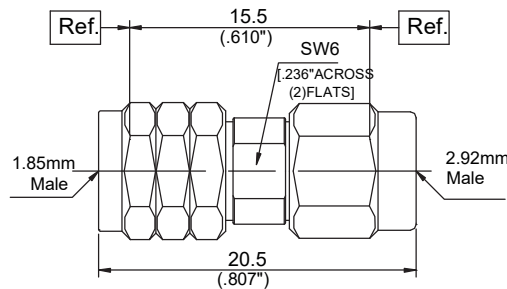

P/N	DPA23118104
Descr.	2.92mm M to 1.85mm M
Freq.	DC-40GHz
VSWR	1.15:1(Max)