


Performance Features


- Nominal Impedance: 50Ω
- Frequency Range: DC-33 GHz
- Durability: 500 Cycles
- Operating Temperature: -55°C~+165°C

Materials/Finishes


- Housing: Type 303 Stainless Steel - Polished & Passivated
- Center Contact: Beryllium Copper Plated Gold
- Insulators: PEI

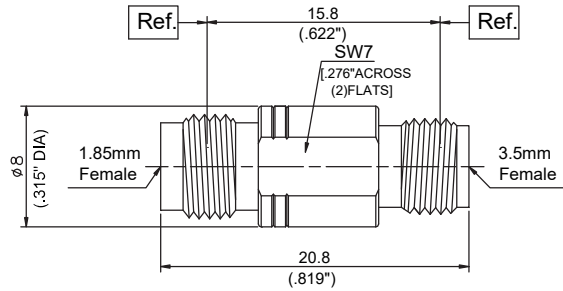


P/N	DPA24018001
Descr.	3.5mm F to 1.85mm F
Freq.	DC-33GHz
VSWR	1.15:1(Max)

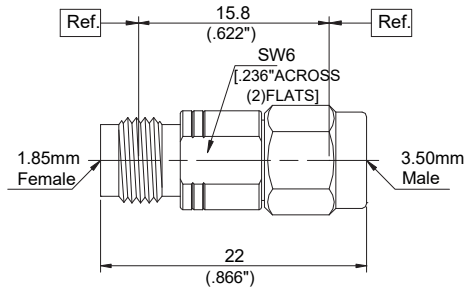

P/N	DPA24118002
Descr.	3.5mm M to 1.85mm F
Freq.	DC-33GHz
VSWR	1.15:1(Max)

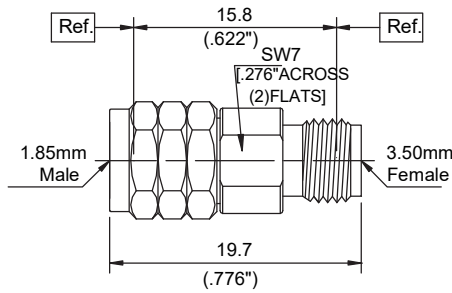

P/N	DPA24018103
Descr.	3.5mm F to 1.85mm M
Freq.	DC-33GHz
VSWR	1.15:1(Max)

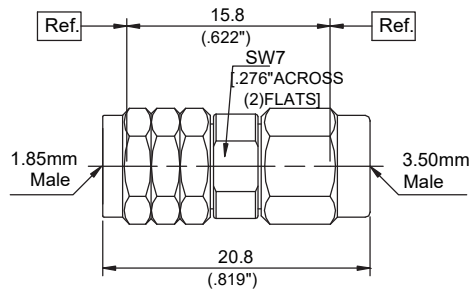

P/N	DPA24118104
Descr.	3.5mm M to 1.85mm M
Freq.	DC-33GHz
VSWR	1.15:1(Max)