


Performance Features


- Nominal Impedance: 50Ω
- Frequency Range: DC-18 GHz
- Durability: 500 Cycles
- Operating Temperature: -55°C~+165°C

Materials/Finishes


- Housing: Type 303 Stainless Steel - Polished & Passivated
- Center Contact: Beryllium Copper Plated Gold
- Insulators: PEI

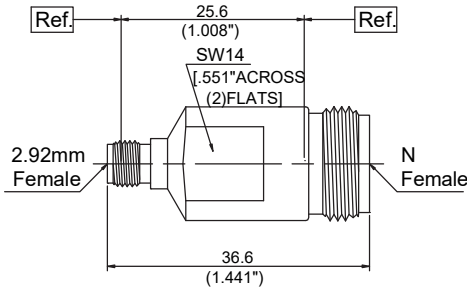


P/N	DPA28023001
Descr.	N Female to 2.92mm Female
Freq.	DC-18GHz
VSWR	1.15:1(Max)

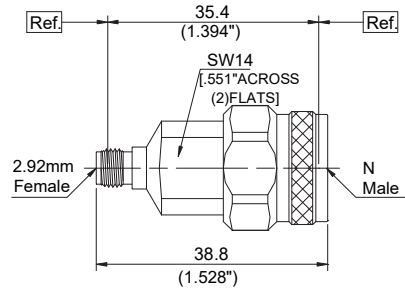

P/N	DPA28123002
Descr.	N Male to 2.92mm Female
Freq.	DC-18GHz
VSWR	1.15:1(Max)

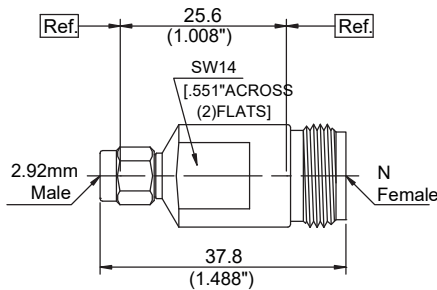

P/N	DPA28023103
Descr.	N Female to 2.92mm Male
Freq.	DC-18GHz
VSWR	1.15:1(Max)

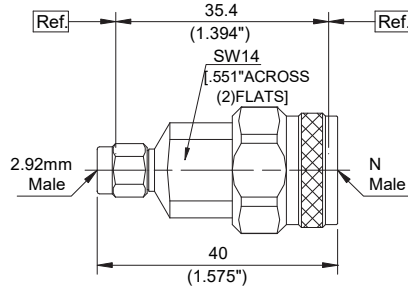

P/N	DPA28123104
Descr.	N Male to 2.92mm Male
Freq.	DC-18GHz
VSWR	1.15:1(Max)