

## Performance Features

Nominal Impedance: 50Ω

Frequency Range: DC-11 GHz

Durability: 500 Cycles


Operating Temperature: -55°C~+165°C

## Materials/Finishes


Housing: Type 303 Stainless Steel - Polished & Passivated

Center Contact: Beryllium Copper Plated Gold


Insulators: PEI&PTFE

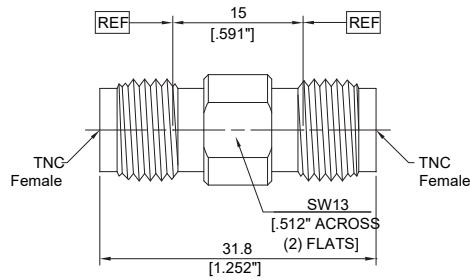

P/N	DPA26026001
Descr.	TNC Female to TNC Female
Freq.	DC-11GHz
VSWR	1.15:1(Max)

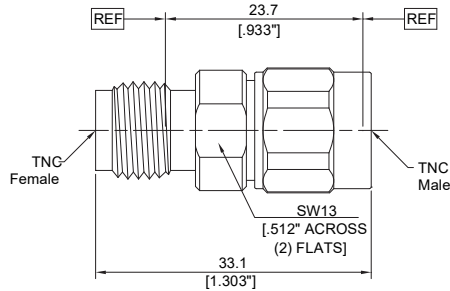

P/N	DPA26026102
Descr.	TNC Male to TNC Female
Freq.	DC-11GHz
VSWR	1.15:1(Max)

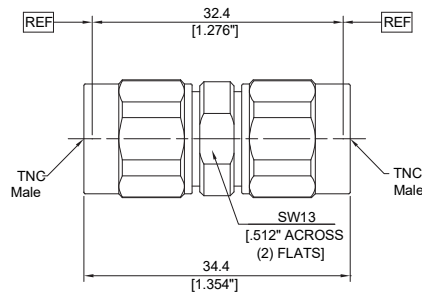

P/N	DPA26126103
Descr.	TNC Male to TNC Male
Freq.	DC-11GHz
VSWR	1.15:1(Max)