


Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2020.12.12	A. M

**ELECTRICAL PERFORMANCE**  
 Frequency Range: 2.17-3.3 GHz  
 Insertion Loss: 0.1 dB max.  
 VSWR: 1.05 max.

**MATERIAL**  
 Body: Aluminum, Oxized  
 Paint: Gray

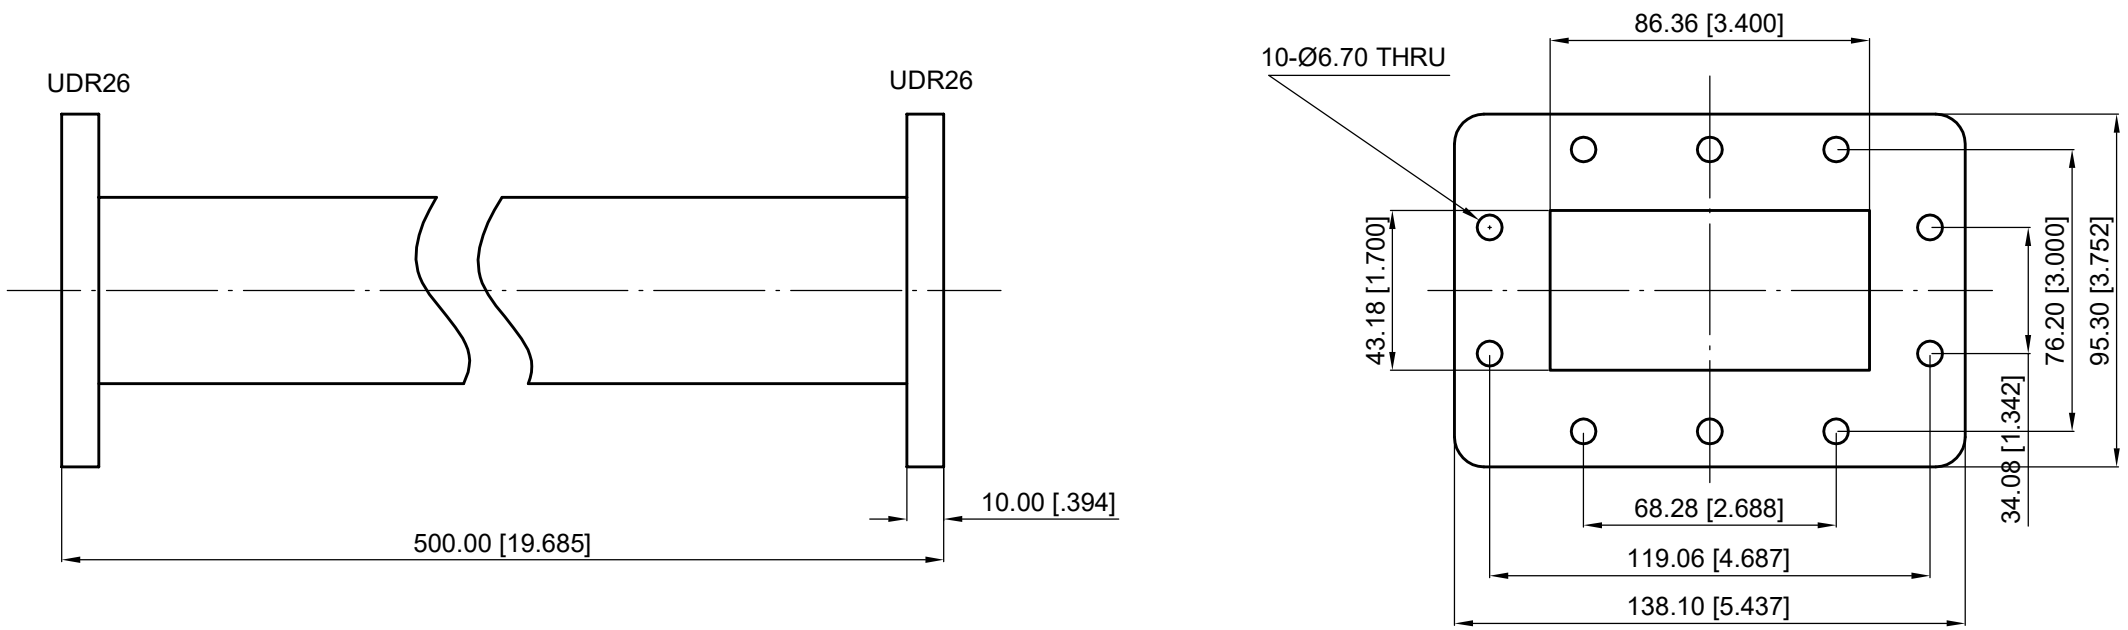

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2020.12.12
Checked:	T. L 2020.12.12
Approved:	A. M 2020.12.12
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Straight Waveguide, WR340(UDR26) at Both Side, Length 500 mm
Part No:	

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size:	Scale:	Sheet:	Rev:
A3	2:1	1/1	A