


**ELECTRICAL SPECIFICATIONS**  
 Frequency Range: 1710-1785 MHz  
 Insertion Loss: 0.3 dB max.  
 Isolation: 23 dB min.  
 VSWR: 1.20 max.  
 Forward Power: 60 W  
 Reverse Power: 10W  
 Direction: Clockwise

Revisions			
Rev	Description	Date	Approved:
A	Initial Release	2015.5.12	A. M

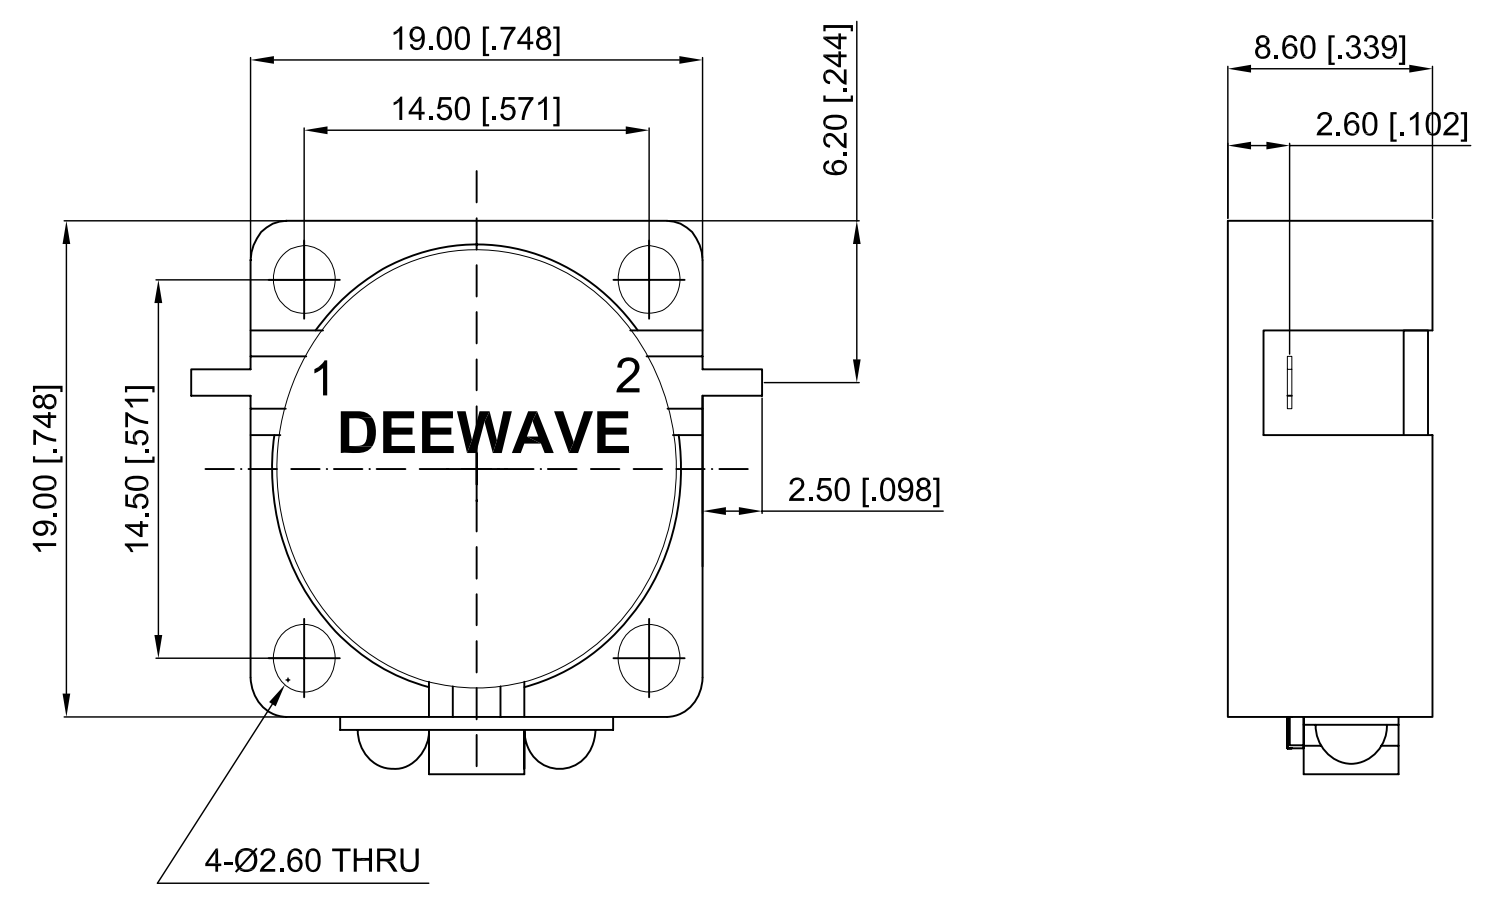

NOTES:  
 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME  
 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Drawn:	W. Y 2015.5.12
Checked:	T. L 2015.5.12
Approved:	A. M 2015.5.12
Unless Otherwise Specified Dimensions are in Millimeters, Dimensions in [ ] are in Inches for Customer Reference Only. Unless Otherwise Specified Tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	

Title:	Drop-in Isolator Freq 1710-1785 MHz
Part No:	DDI171178-3

**DEEWAVE**  
[www.deewave.com](http://www.deewave.com)

View:

Size:	Scale:	Sheet:	Rev:
A3	3:1	1/1	A